
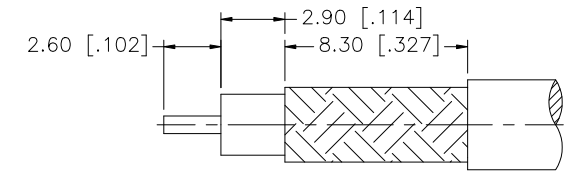
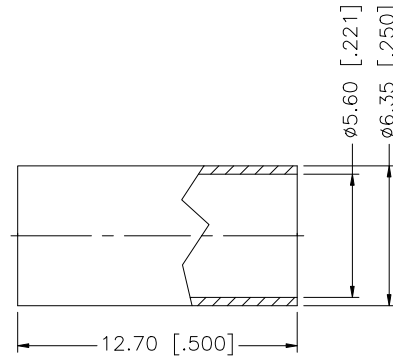


REV.	DATE	ECR NO.	DESCRIPTION
NC	01/28/99	—	INITIAL RELEASE
A	12/16/08	100064	UPDATE DRAWING FORMAT

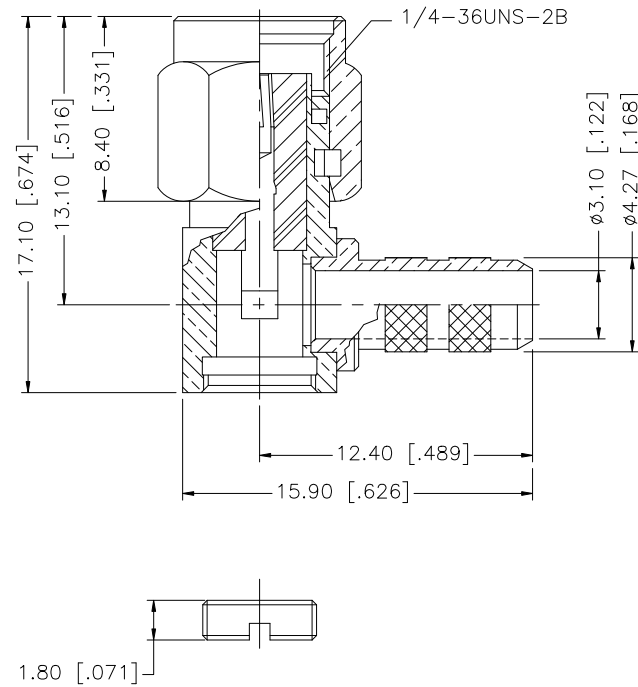

RECOMMENDED
CABLE STRIPPING DIM'S

NOTE:

1. CRIMPED FERRULE HEX CRIMP SIZE .213" [5.41]
2. CONTACT PIN TO SOLDER.

						UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.		APPROVALS		DATE		Amphenol Connex					
8	FERRULE	COPPER	GOLD	1		UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm		DRAWN	GRS	12/16/08							
7	COVER	BRASS	GOLD	1				CHECKED				PART DESCRIPTION SMA R/A CRIMP PLUG – REVERSE POLARITY (FOR RG223/U, 400/U CABLE)					
6	GASKET	SILICONE	RED	1				ISSUED									
5	RETAINER RING	BER. COPPER	NATURAL	1				SHEET	1 OF 1				PART NO. 132194RP				
4	CONTACT PIN	BER. COPPER	GOLD	1													
3	INSULATOR	PTFE	NATURAL	1				CAD FILE				DWG. NO. 132194RP.DWG REV. A SIZE A SCALE NA					
2	HOUSING	BRASS	GOLD	1				C:/132/132194RP.DWG									
1	BODY/SHELL	BRASS	GOLD	1		UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007" .315 – 1.180 = ± 0.015" 1.180 – 4.724 = ± 0.020"		DO NOT SCALE DRAWING									
DESCRIPTION		MATERIAL	FINISH	QTY													