
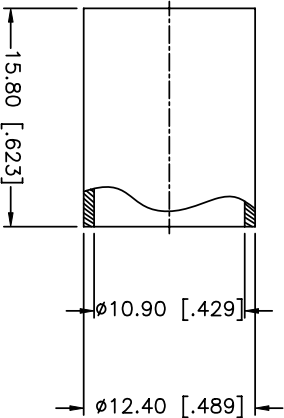
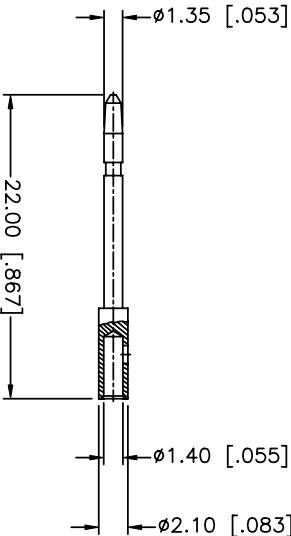
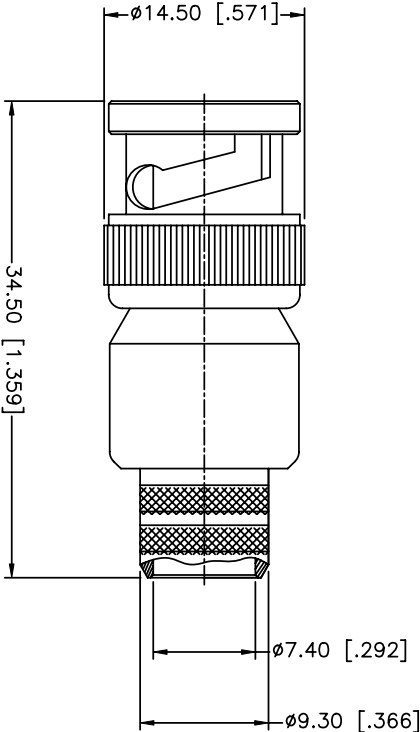


REV.	DATE	ECR NO.	DESCRIPTION
NC	02/20/03	XXXX	INITIAL RELEASE
A	08/15/04	XXXX	UPDATE DRAWING FORMAT/MODIFY CONTACT PIN
B	02/19/13	2450	CORRECT I.D. OF CONTACT PIN, CORRECT PART DESCRIPTION, UPDATE DRAWING FORMAT

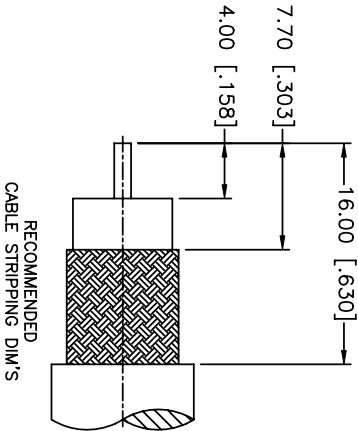

1. IMPEDANCE:75 OHM
2. FREQUENCY RANGE:DC-4 GHz
3. DIELECTRIC WITHSTANDING VOLTAGE:1500 VRMS
4. INSULATION RESISTANCE:5000 MOHMS MIN.
5. DURABILITY:500 CYCLES
6. CRIMPED FERRULE HEX CRIMP SIZE .429"
7. CRIMPED CONTACT PIN HEX CRIMP SIZE .068"
8. TEMPERATURE RANGE:-65°C TO +165°C

10	FERRULE	BRASS	NICKEL	1	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: <0.5 ± 0.05mm 0.5 - 6mm ± 0.10mm 6 - 30mm ± 0.20mm 30 - 120mm ± 0.30mm ANGLES ± 1° UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: <.020 ± 0.002" .020 - .236 = ± 0.004" .236 - 1.180 = ± 0.007" 1.180 - 4.724 = ± 0.012" ANGLES ± 1°	APPROVALS		DATE	Amphenol Connex BNC CRIMP PLUG FOR M17/6-RG11 CABLE 112576	
9	CONTACT PIN	BRASS	GOLD	1		DRAWN	J-JL	02/19/13		
8	SHELL	BRASS	NICKEL	1						
7	GASKET	RUBBER	RED	1						
6	RETAINER RING	BRASS	NICKEL	1		CHECKED				
5	SPRING	SK5	NICKEL	1		ISSUED				
4	WASHER	BRASS	NICKEL	1		SHEET	1 OF 1			
3	BARREL	BRASS	NICKEL	1						
2	INSULATOR	PTFE	NATURAL	1						
1	BODY	BRASS	NICKEL	1						
DESCRIPTION					MATERIAL		FINISH	QTY	DO NOT SCALE DRAWING	
					CAD FILE		Y:/CONNEX/112576.DWG		DWG. NO. 112576	
					REV. B		SIZE A	SCALE NA		

Amphenol Connex

BNC CRIMP PLUG FOR M17/6-RG11 CABLE

112576