
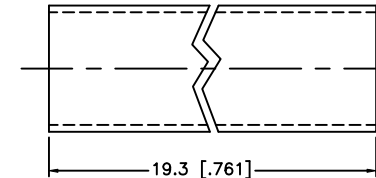

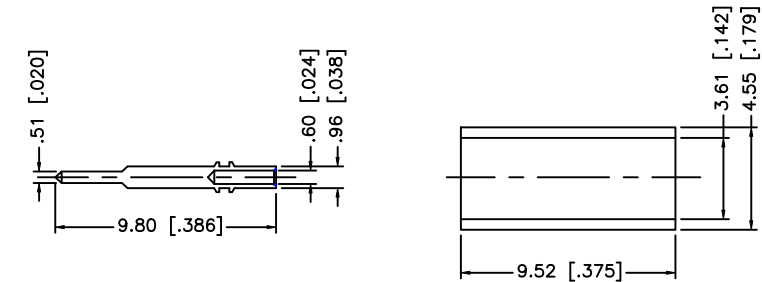
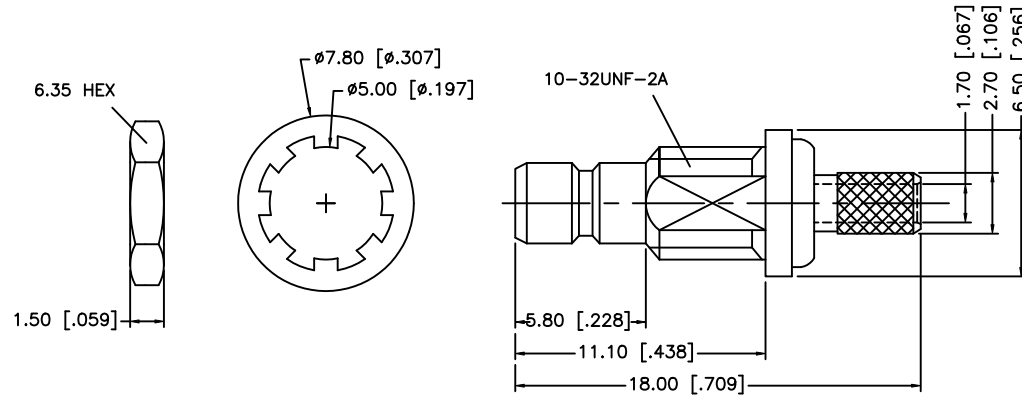


REV.	DATE	ECR NO.	DESCRIPTION
NC	01/25/99	–	INITIAL RELEASE
A	07/20/05	–	UPDATE DRAWING FORMAT
B	05/08/07	–	REVISE BARREL AND FERRULE DIMENSIONS
C	05/25/08	–	REVISE NOTE 1 TO .151" HEX, REMOVE NOTE 2.
D	11/11/08	–	ADD NOTE 2 "CONTACT PIN TO SOLDER"

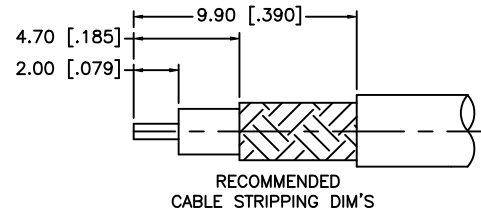

NOTE:

1. CRIMPED FERRULE HEX CRIMP SIZE .151"
2. CONTACT PIN TO SOLDER.
3. MAX. PANEL THICKNESS = 2.4mm

					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007" .315 – 1.180 = ± 0.015" 1.180 – 4.724 = ± 0.020" DO NOT SCALE DRAWING	APPROVALS		DATE		Amphenol Connex						
8						DRAWN	G.R.S.	11/11/08								
7	HEAT SHRINK TUBE			1		CHECKED										
6	FERRULE	COPPER	GOLD	1		ISSUED				PART DESCRIPTION SMB BULKHEAD CRIMP JACK (FOR RG-316U/D CABLE)						
5	HEX NUT	BRASS	GOLD	1		SHEET		1 OF 1								
4	LOCK WASHER	BRASS	GOLD	1		CAD FILE		C:/142/142192.DWG		PART NO. 142192						
3	CONTACT PIN	BRASS	GOLD	1		DWG. NO.		142192.DWG							REV.	D
2	INSULATOR	TEFLON	NATURAL	1												
1	BODY	BRASS	GOLD	1												
	DESCRIPTION	MATERIAL	FINISH	QTY												