
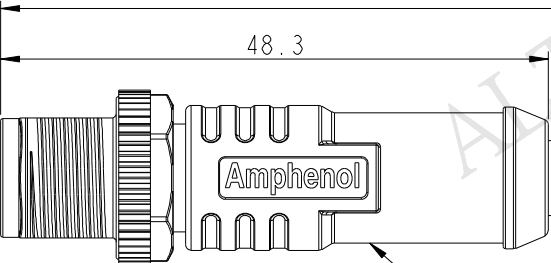
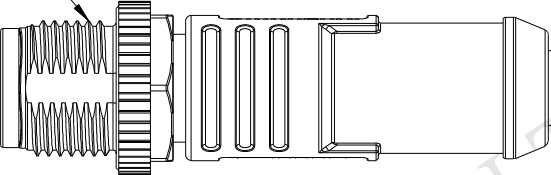



1		2		3		4		5		6		7		8	
ALTW CONFIDENTIAL 2018-08-10 R&D DEPT. ALTW DCC. DEPT. CONFIDENTIAL 2018.08.15 ISSUED  Conn.  Pin Assignment Front View				REV.		ECN NO.		DATE		SIGN		DESCRIPTION			
				A		Initial Release		2016-12-21		Spring Liu		Change Rev.01 To Rev.A			
				B		CI80009		2018-08-10		Fisher Wang		update drawing			
 48.3  6.6				① MSXS-08BMMM-SL7000		② Cable		③ L (mm)							
 Conn.  Pin Assignment Front View				MSXS-08BMMM-SL7XXX		XX : 01~99Meters 01 : 01Meter 02 : 02Meters 99 : 99Meters		Cable Length(L):01~99Meters							
UNIT:mm  TOLERANCE .X ±0.25 .XX ±0.1 .XXX ±0.05 ANGLES ±1°				TITLE MI2 X-code 8Pin Male Shielded Cable Connector		Amphenol LTW 安費諾亮泰企業股份有限公司		ITEM NO		DRAWN BY Fisher Wang		DATE 2018-08-10			
				SCALE 3:2		SIZE A4		SHEET 1 OF 1		DWG NO MSXS-08BMMM-SL7XXX		CHECKED BY Victor Hung		DATE 2018-08-10	
REV. B WC-REV. A.4 QC: Inspection item								CUSTOMER ALTW		APPROVED BY Kevin Hu		DATE 2018-08-10			
1		2		3		4		5		6		7		8	

Note:

- * ③ Important Dimensions To Check.
- * Waterproof Rate: IP67
- * Connector: Nylon+GF, Black
- * Male Pin: Copper Alloy, Gold Plated
- * Screw Nut: Zinc Alloy, Nickel Plated
- * Shield: Copper Alloy
- * Outer Mold: PU, Black
- * Cable: Cat6A, 26AWG*4P+B, LSZH, UV resistant
OD 6.6mm, Green Jacket.
- * Rated Voltage: 50 V AC, 60 V DC
- * Rated Current: 0.5A
- * Cable length Tolerance: 01M: ±40mm
02M~05M±60mm
06M~10M±100mm
11M~30M±200mm
31M~99M±500mm