
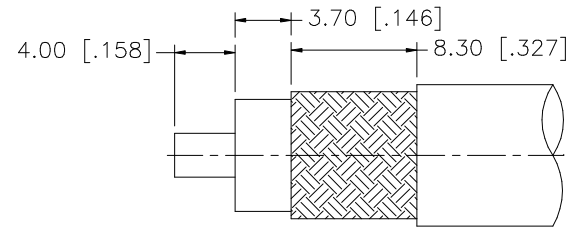
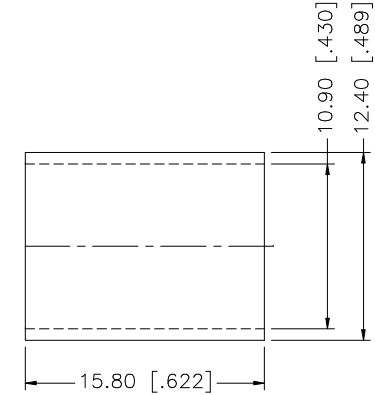
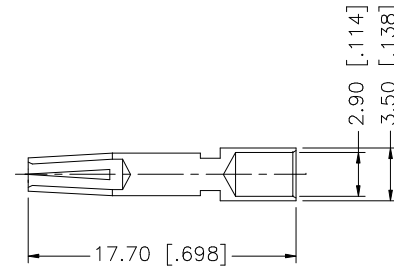


REV.	DATE	DESCRIPTION
A	01/30/04	UPDATE DRAWING FORMAT

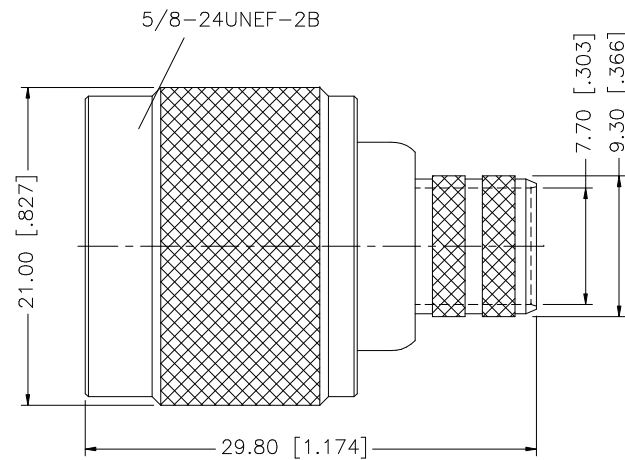

RECOMMENDED
CABLE STRIPPING DIM'S

NOTE:

1. CRIMPED FERRULE
HEX CRIMP SIZE .429"
2. CRIMPED CONTACT PIN
HEX CRIMP SIZE .118"

8					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 - 8mm ± 0.20mm 8 - 30mm ± 0.40mm 30 - 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 - .315 = ± 0.007" .315 - 1.180 = ± 0.015" 1.180 - 4.724 = ± 0.020"	APPROVALS		DATE	Amphenol Connex			
7						DRAWN	G.R.S.	01/30/04				
6						CHECKED						
5						ISSUED						
4	FERRULE	COPPER	NEXCOTE	1		SHEET	1 OF 1					
3	CONTACT PIN	PHOS. BRONZE	GOLD	1	DO NOT SCALE DRAWING				PART DESCRIPTION			
2	INSULATOR	TEFLON	NATURAL	1					N CRIMP PLUG, REVERSE POLARIZED			
1	BODY	BRASS	NEXCOTE	1					BELDEN 9913, 9914 BRAND REX H243 + LMR 400			
	DESCRIPTION	MATERIAL	FINISH	QTY					PART NO. 172102H243RP			
						CAD FILE		C:/172/172102H243RP.DWG	DWG. NO. 172102H243RP.DWG			
									REV. A	SIZE A	SCALE NA	