
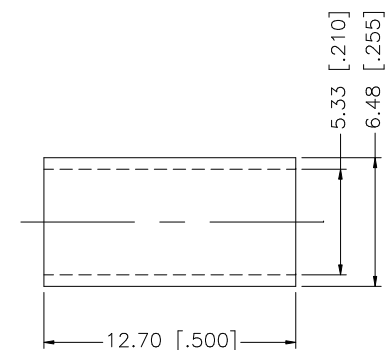
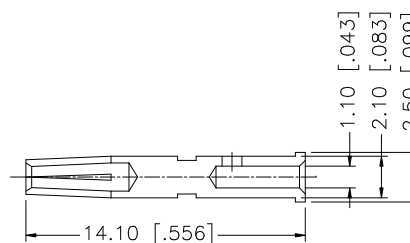
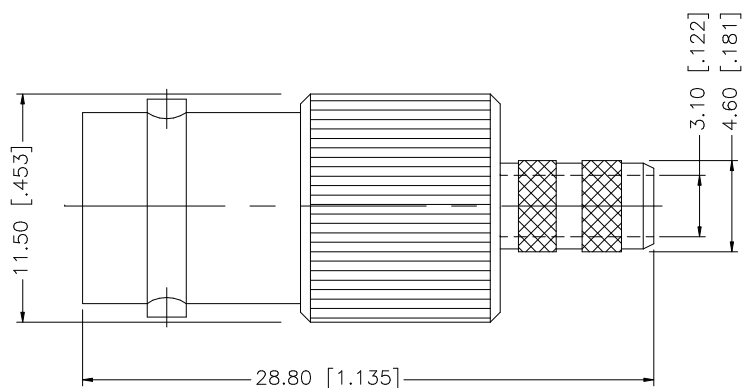


REV.	DATE	DESCRIPTION
A	01/04/04	UPDATE DRAWING FORMAT

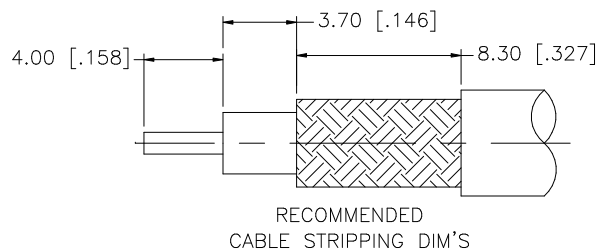

NOTE:

1. CRIMPED FERRULE
HEX CRIMP SIZE .213"
2. CRIMPED CONTACT PIN
HEX CRIMP SIZE .068"

					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007” .315 – 1.180 = ± 0.015” 1.180 – 4.724 = ± 0.020” DO NOT SCALE DRAWING	APPROVALS	DATE	Amphenol Connex BNC CRIMP JACK (FOR RG-58C/U CABLE) 50 ohms										
8						DRAWN	G.R.S.						01/04/04	PART DESCRIPTION				
7						CHECKED												
6						ISSUED												
5						SHEET	1 OF 1		PART NO. 112144									
4	FERRULE	COPPER	NICKEL	1														
3	CONTACT PIN	PHOS. BRONZE	GOLD	1					DWG. NO. 112144.DWG REV. A SIZE A SCALE NA									
2	INSULATOR	TEFLON	NATURAL	1														
1	HOUSING/BODY	BRASS	NICKEL	1														
	DESCRIPTION	MATERIAL	FINISH	QTY		CAD FILE	C:/112/112144.DWG											