
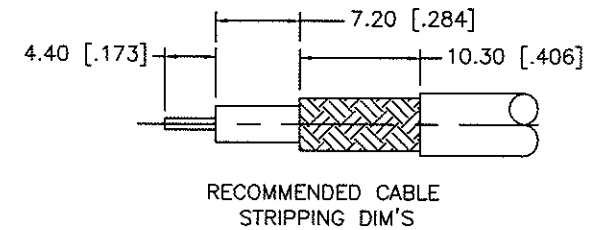



REV.	DATE	ECR NO.	DESCRIPTION
A	12/29/00	—	REVISE PLATING TO SILVER
B	07/30/06	—	REVISE PLATING TO NEXCOTE, UPDATE DRAWING FORMAT
C	07/27/08	—	REVISE MATING FACE TO 32 HEX NUT, FERRULE I.D.

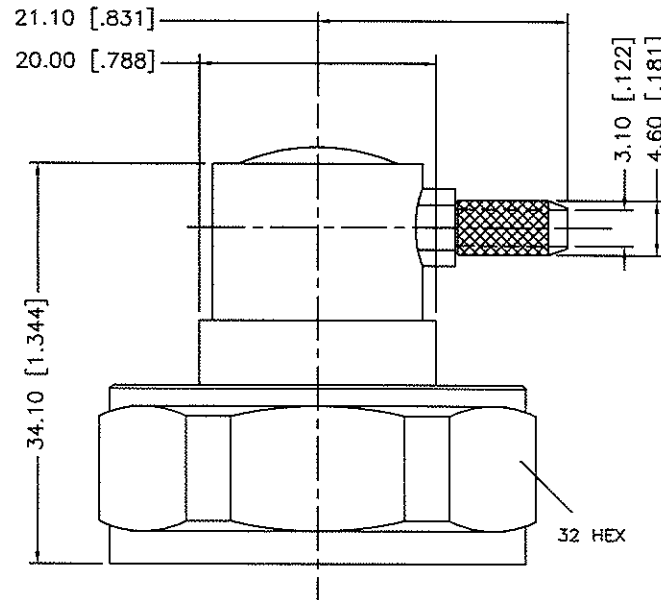

NOTE:

1. CRIMPED FERRULE HEX CRIMP SIZE .213"
2. CONTACT PIN TO SOLDER

					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 - 8mm ± 0.20mm 8 - 30mm ± 0.40mm 30 - 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 - .315 = ± 0.007" .315 - 1.180 = ± 0.015" 1.180 - 4.724 = ± 0.020" DO NOT SCALE DRAWING	APPROVALS		DATE		Amphenol Connex				
8						DRAWN	GRS	07/27/08						
7						CHECKED								
6	FERRULE	BRASS	NEXCOTE	1		ISSUED				PART DESCRIPTION				
5	COVER	BRASS	NEXCOTE	1		SHEET		1 OF 1		7/16 R/A CRIMP PLUG (FOR RG-58/U, LMR 195 CABLE)				
4	GASKET	SILICONE	BLACK	1						PART NO.				
3	CONTACT PIN	BER. COPPER	SILVER	1						272111				
2	INSULATOR	PTFE	NATURAL	1						DWG. NO.				
1	BODY	BRASS	NEXCOTE	1						272111.DWG				
DESCRIPTION						MATERIAL	FINISH	QTY	CAD FILE		REV.	SIZE	SCALE	
								C:/272/272111.DWG		C	A	NA		