


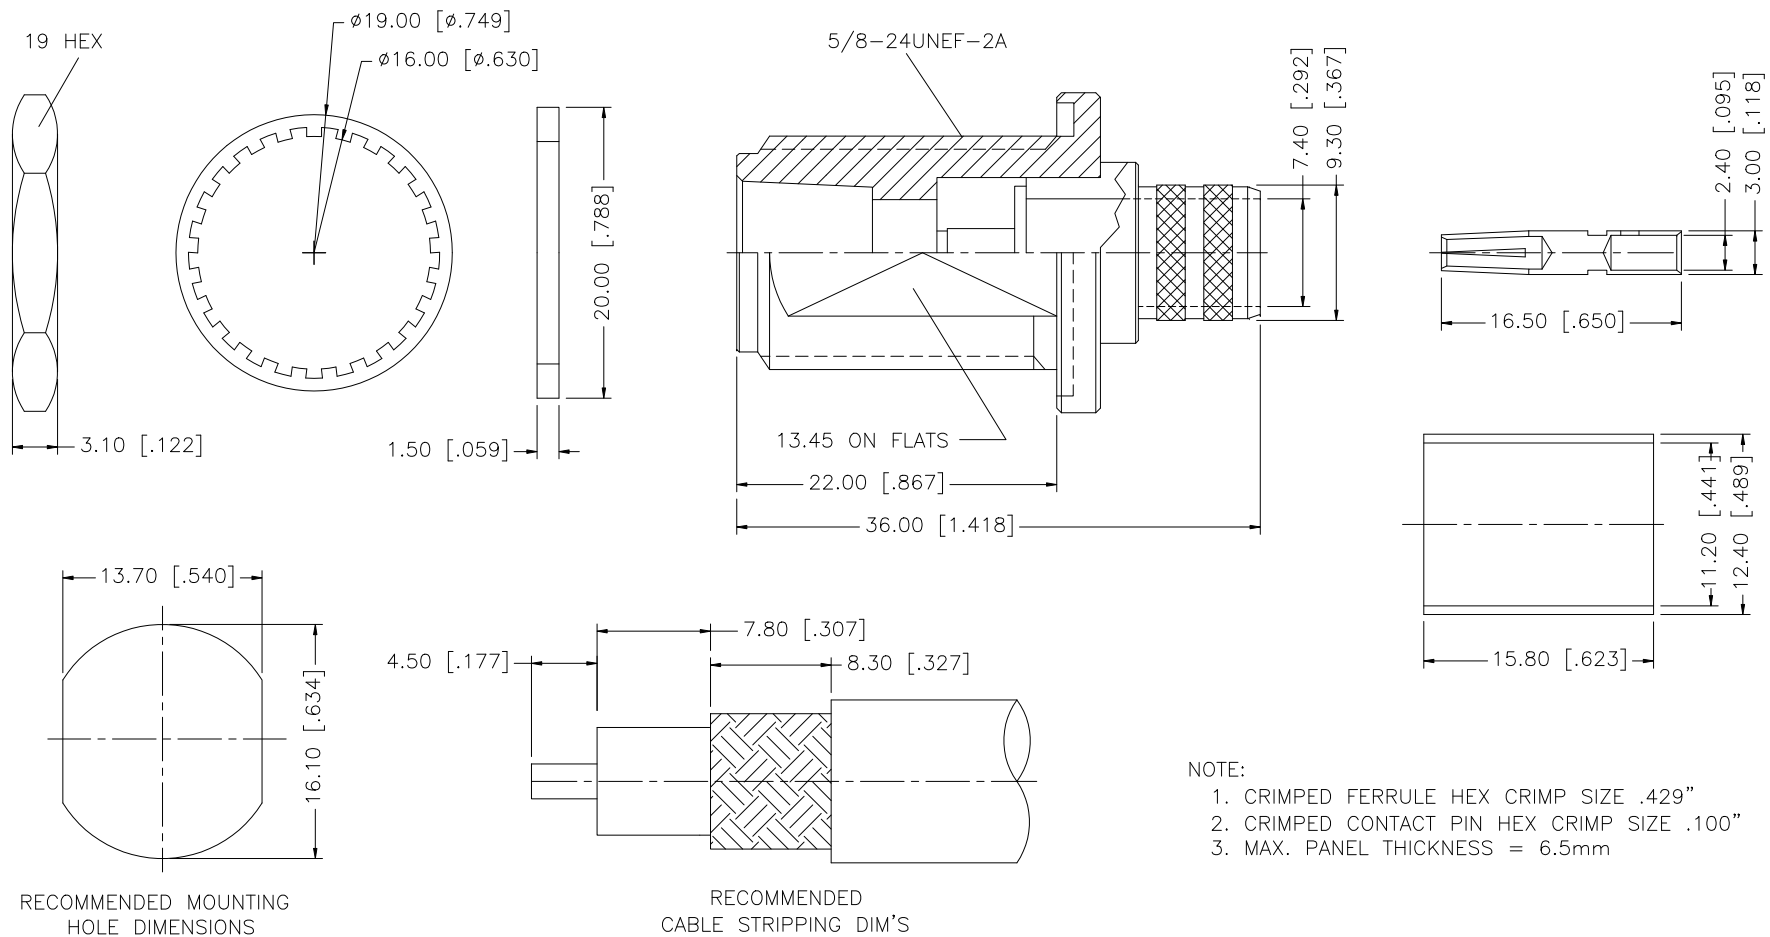

					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007" .315 – 1.180 = ± 0.015" 1.180 – 4.724 = ± 0.020"	APPROVALS		DATE		Amphenol Connex				
8	FERRULE	COPPER	NEXCOTE	1		DRAWN	G.R.S.	07/08/07						
7	CONTACT PIN	BER. COPPER	GOLD	1		CHECKED								
6	HEX NUT	BRASS	NEXCOTE	1		ISSUED			PART DESCRIPTION N BULKHEAD CRIMP JACK (FOR RG-214/U CABLE)					
5	LOCK WASHER	BRASS	NEXCOTE	1		SHEET	1 OF 1							
4	GASKET	SILICONE	RED	1	PART NO. 172168									
3	BARREL	BRASS	NEXCOTE	1										
2	INSULATOR	TEFLON	NATURAL	1	DWG. NO. 172168.DWG					REV. NC	SIZE A	SCALE NA		
1	BODY	BRASS	NEXCOTE	1										
DESCRIPTION		MATERIAL	FINISH	QTY	DO NOT SCALE DRAWING		C:/172/172168.DWG							

Amphenol Connex

N BULKHEAD CRIMP JACK
(FOR RG-214/U CABLE)