
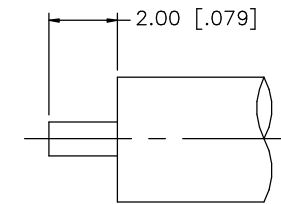



REV.	DATE	DESCRIPTION
NC	06/10/03	INITIAL RELEASE

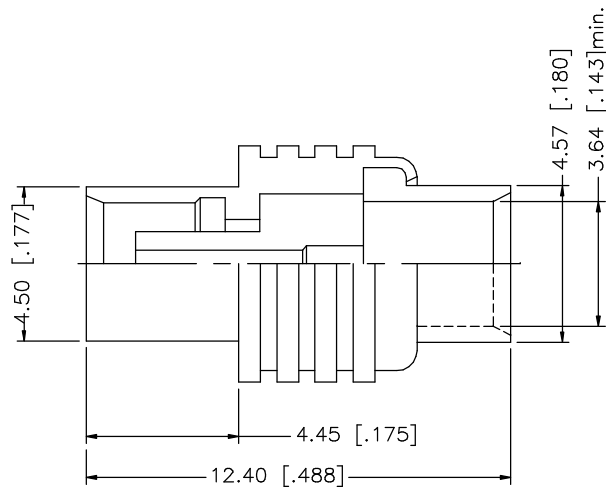

RECOMMENDED CABLE
STRIPPING DIMENSIONS

NOTE:
1. CONTACT PIN TO SOLDER

					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007" .315 – 1.180 = ± 0.015" 1.180 – 4.724 = ± 0.020" DO NOT SCALE DRAWING	APPROVALS	DATE	Amphenol Connex							
8						DRAWN	G.R.S.							06/10/03	
7						CHECKED									
6						ISSUED			PART DESCRIPTION						
5									MCX DIRECT SOLDER JACK (.141” SEMI RIGID CABLE)						
4								PART NO.							
3	CONTACT PIN	BER. COPPER	GOLD	1				252184							
2	INSULATOR	TEFLON	NATURAL	1											
1	BODY	BRASS	GOLD	1											
	DESCRIPTION	MATERIAL	FINISH	QTY		CAD FILE	C:/252/252184.DWG	DWG. NO.	252184.DWG	REV.	NC	SIZE	A	SCALE	NA