

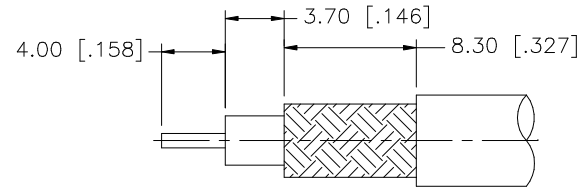
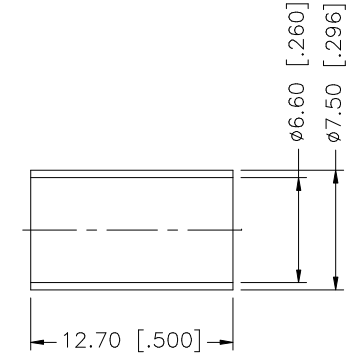


REV.	DATE	DESCRIPTION
NC	06/26/06	INITIAL RELEASE

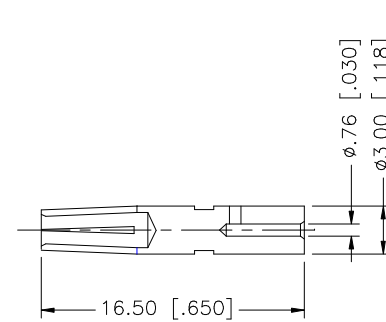

RECOMMENDED
CABLE STRIPPING DIM'S

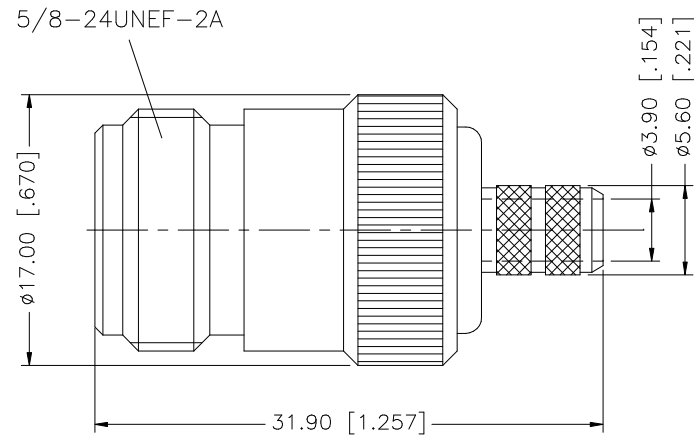

					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007” .315 – 1.180 = ± 0.015” 1.180 – 4.724 = ± 0.020” DO NOT SCALE DRAWING	APPROVALS	DATE	Amphenol Connex				
8						DRAWN	G.R.S.					06/26/06
7						CHECKED						
6						ISSUED			PART DESCRIPTION N CRIMP JACK (FOR RG-59/U CABLE)			
5						SHEET	1 OF 1					
4	FERRULE	COPPER	NEXCOTE	1					PART NO. 172104			
3	CONTACT PIN	PHOS. BRONZE	GOLD	1								
2	INSULATOR	TEFLON	NATURAL	1					DWG. NO. 172104.DWG			
1	BODY	BRASS	NEXCOTE	1								
	DESCRIPTION	MATERIAL	FINISH	QTY	CAD FILE C:/172/172104.DWG			REV. A	SIZE A	SCALE NA		