


## Coaxial Panel Connector 23\_BNC-75-0-10/133\_N

### Description

Straight panel receptacle jack, flange mount

Interface standards

Interface compatible with IEC 61169-8

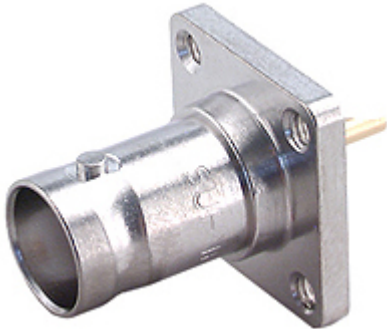

### Technical Data

#### Electrical Data

|                          |             |
|--------------------------|-------------|
| Impedance                | 75 $\Omega$ |
| Interface frequency max. | 1 GHz       |

#### Mechanical Data

|                   |           |
|-------------------|-----------|
| Number of matings | 500       |
| Weight            | 0.0102 kg |

#### Environmental Data

|                                                      |                  |
|------------------------------------------------------|------------------|
| Operating temperature                                | -65 °C to 165 °C |
| 2011/65/EU (RoHS - including 2015/863 and 2017/2102) | compliant        |

#### Material Data

| Piece Parts    | Material               | Surface Plating                   |
|----------------|------------------------|-----------------------------------|
| Centre contact | Copper Beryllium Alloy | Gold Plating (Nickel underplated) |
| Outer contact  | Brass                  | SUCOPLATE (R) Plating             |
| Body           | Brass                  | SUCOPLATE (R) Plating             |
| Insulator      | PFA / PTFE             |                                   |

### Related Documents

|                   |              |
|-------------------|--------------|
| Outline drawing   | DOU-00071696 |
| Catalogue drawing | DCA-00011539 |
| Mounting hole     | DOU-00009051 |

### Ordering Information

|                |                       |
|----------------|-----------------------|
| Single package | 23_BNC-75-0-10/133_NE |
|----------------|-----------------------|