

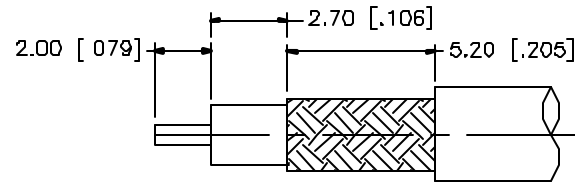
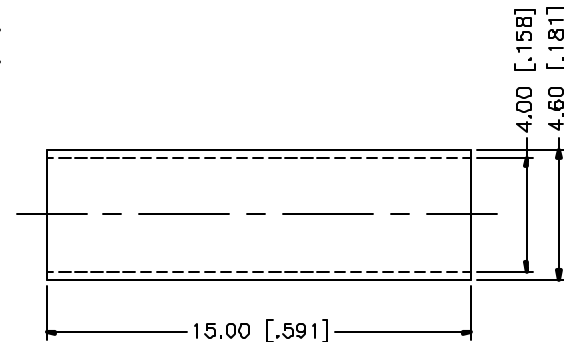



REV.	DATE	DESCRIPTION
A	01/14/04	UPDATE DRAWING FORMAT



RECOMMENDED
CABLE STRIPPING DIM'S

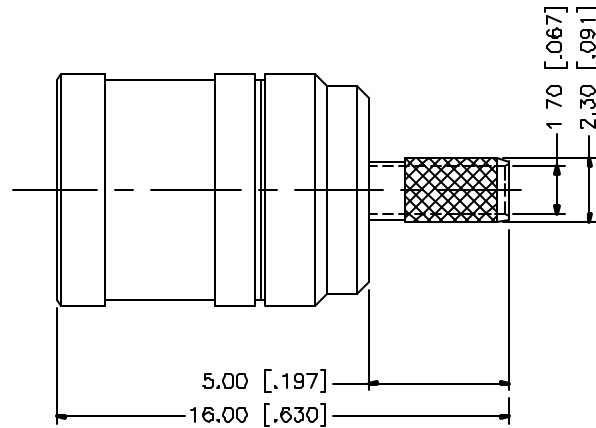

NOTE:

1. CRIMPED FERRULE
HEX CRIMP SIZE .128"
2. CONTACT PIN TO SOLDER.

					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS DIMENSIONS IN () ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.	APPROVALS	DATE	Amphenol Connex								
8						DRAWN	G.R.S.						01/14/04			
7						CHECKED										
6					UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 - 8mm ± 0.20mm 8 - 30mm ± 0.40mm 30 - 120mm ± 0.50mm	ISSUED			PART DESCRIPTION							
5	HEAT SHRINK TUBE		BLACK	1					SMB CRIMP PLUG (FOR RG-179/U, 187A/U)							
4	FERRULE	COPPER	GOLD	1					PART NO							
3	CONTACT PIN	BER. COPPER	GOLD	1					142103							
2	INSULATOR	TEFLON	NATURAL	1		UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: 0.020 - .315 = ± 0.007" .315 - 1.180 = ± 0.015" 1.180 - 4.724 = ± 0.020"	1 OF 1									
1	BODY	BRASS	GOLD	1												
	DESCRIPTION	MATERIAL	FINISH	QTY	DO NOT SCALE DRAWING		CAD FILE	C:/142/142103.DWG	DWG NO	142103.DWG	REV.	A	SIZE	A	SCALE	NA