


REV.	DATE	DESCRIPTION
NC	06/06/04	INITIAL RELEASE

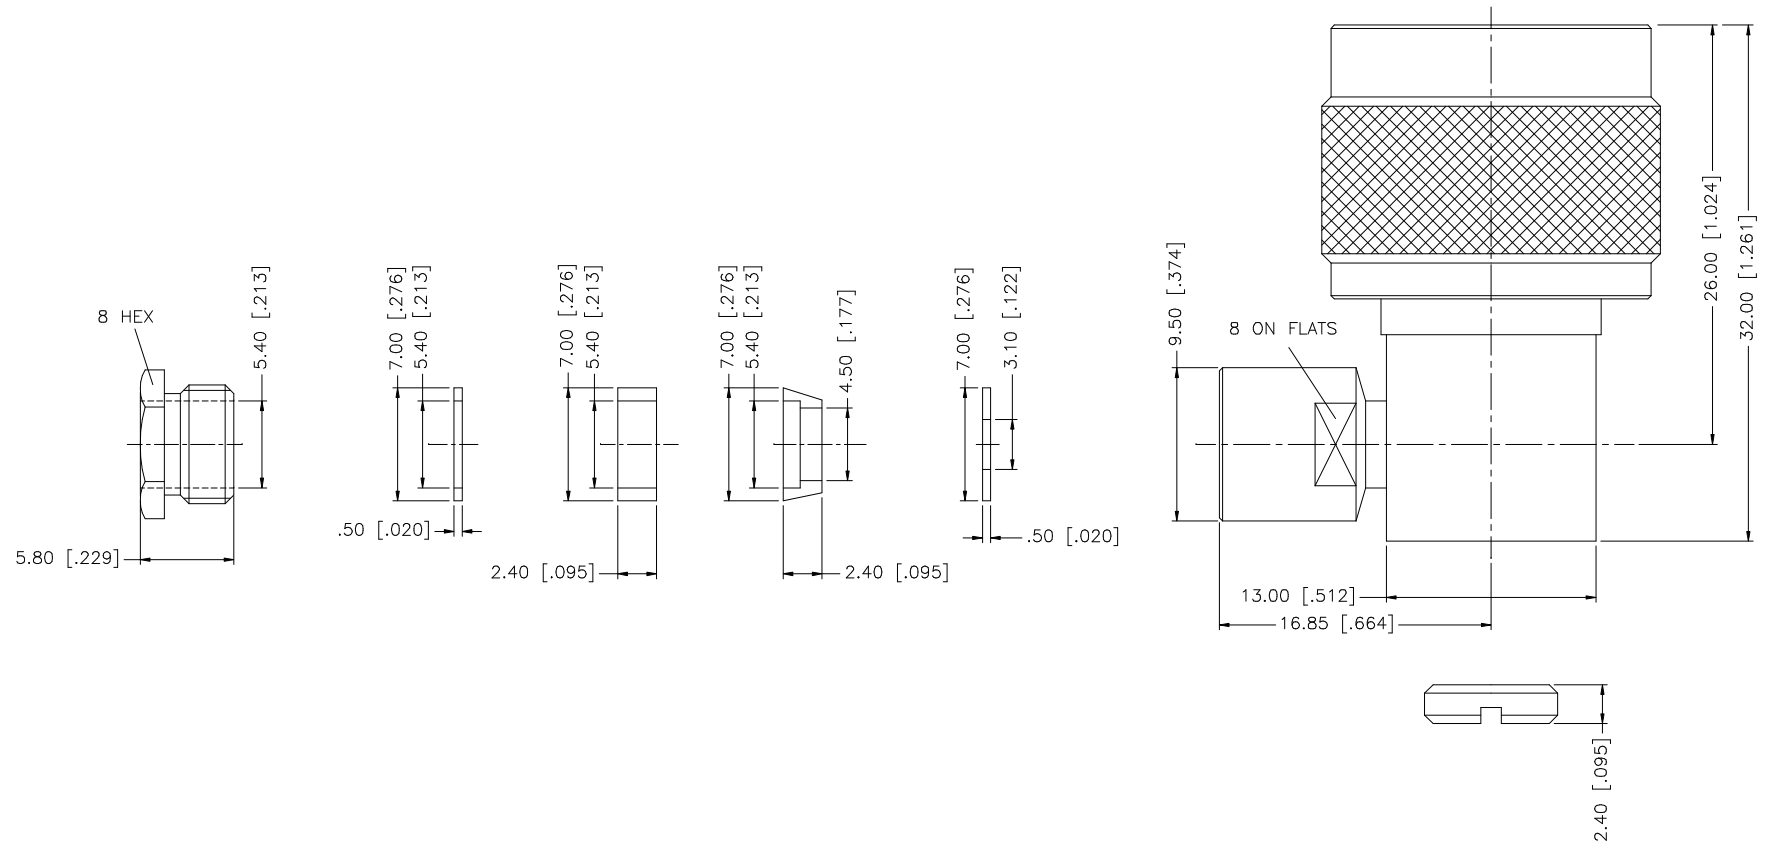

NOTE:
1. CONTACT PIN TO SOLDER

						UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.		APPROVALS		DATE		Amphenol Connex						
8	NUT	BRASS	NEXCOTE	1	UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007” .315 – 1.180 = ± 0.015” 1.180 – 4.724 = ± 0.020”	DRAWN	G.R.S.	06/06/04	PART DESCRIPTION N R/A CLAMP PLUG (FOR RG58C/U, 58/U, 142A/U, 223/U)									
7	END CAP/ HEX NUT	BRASS	NEXCOTE	1		CHECKED	PART NO. 172316											
6	WASHER	BRASS	NEXCOTE	1		ISSUED												
5	GASKET	SILICONE	RED	1		DO NOT SCALE DRAWING	SHEET	1 OF 1	DWG. NO.				172316.DWG	REV.	NC	SIZE	A	SCALE
4	WASHER	BRASS	NEXCOTE	1	CAD FILE		C:/172/172316.DWG											
3	CONTACT PIN	BRASS	GOLD	1														
2	INSULATOR	TEFLON	NATURAL	1														
1	SHELL/BODY	BRASS	NEXCOTE	1														
DESCRIPTION		MATERIAL	FINISH	QTY														