

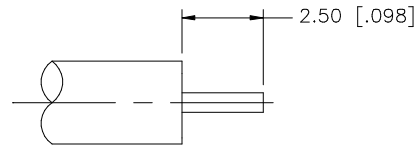
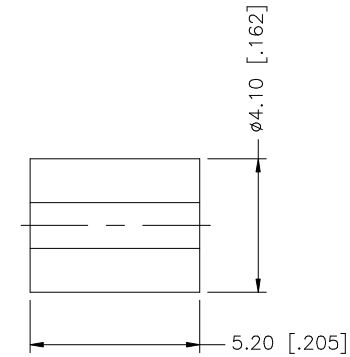


REV.	DATE	DESCRIPTION
NC	01/30/07	INITIAL RELEASE

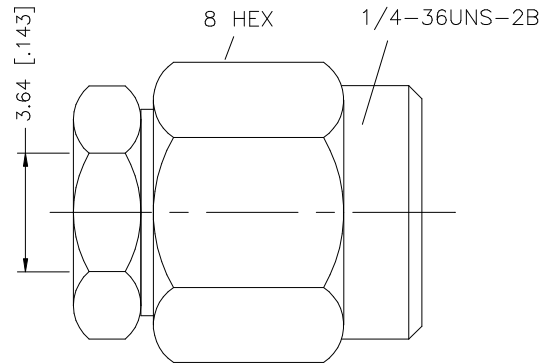

RECOMMENDED
CABLE STRIPPING DIM'S

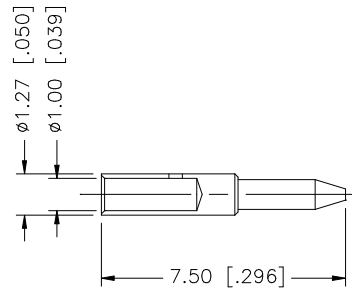

NOTE:

1. NEXCOTE PLATING UNDER GOLD ON BODY AND CENTER CONTACT.
NO NICKEL UNDER COATING.
2. CONTACT PIN TO SOLDER.

					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007” .315 – 1.180 = ± 0.015” 1.180 – 4.724 = ± 0.020” DO NOT SCALE DRAWING	APPROVALS	DATE	Amphenol Connex				
8						DRAWN	G.R.S.					01/30/07
7						CHECKED						
6						ISSUED			PART DESCRIPTION			
5									SMA SEMI-RIGID PLUG (FOR .141” CABLE) TORQUE NUT W/CABLE			
4	COUPLING NUT	STAINLESS STEEL	PASSIVATED S.S.	1				PART NO.				
3	CONTACT PIN	BRASS	GOLD	1				132379				
2	INSULATOR	TEFLON	NATURAL	1								
1	BODY	BRASS	GOLD	1								
	DESCRIPTION	MATERIAL	FINISH	QTY		CAD FILE C:/132/132379.DWG		DWG. NO.	132379.DWG	REV. NC	SIZE A	SCALE NA