
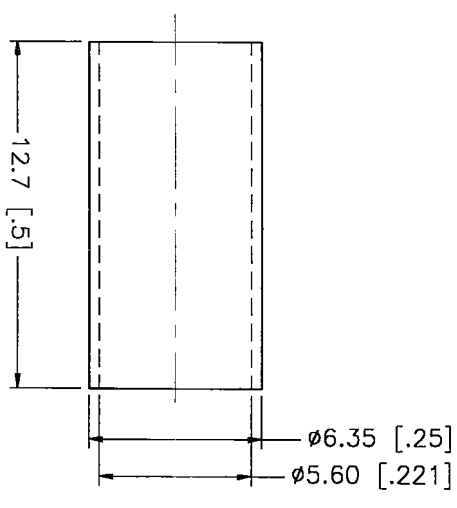
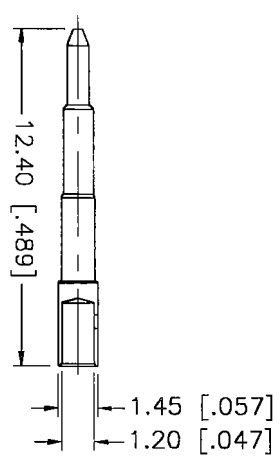
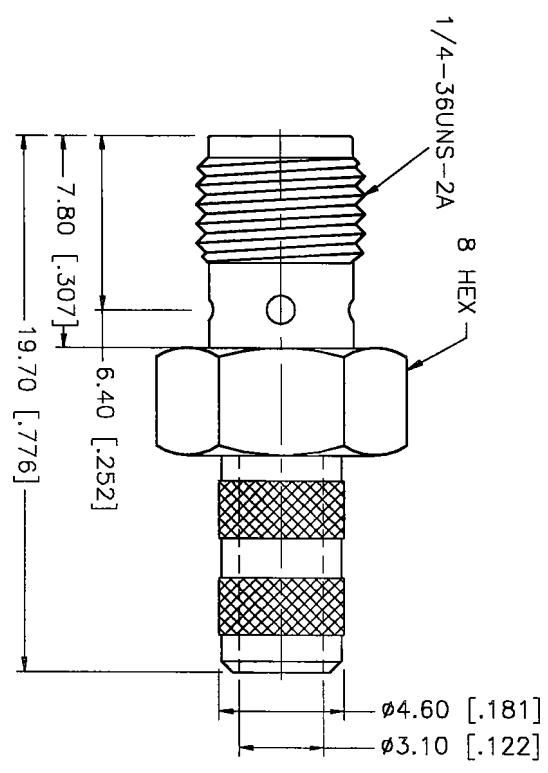


REV.	DATE	DESCRIPTION
NC	07/11/00	INITIAL RELEASE

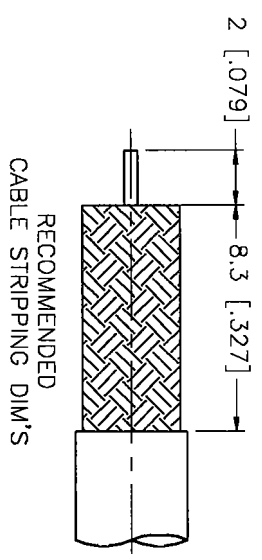

*Clamp Ferrule
Hex CR Size .213*

DESCRIPTION	MATERIAL	FINISH	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS DIMENSIONS IN [] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY		APPROVALS		DATE	Connetex Connector Corporation						
1 BODY	BRASS	GOLD	UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5-6 = ± 0.2 6-30 = ± 0.4 30-120 = ± 0.6 120-315 = ± 1 315-1000 = ± 1.6 1000-2000 = ± 2.4	DO NOT SCALE DRAWING	DRAWN	G.R.S.	07/11/00	TITLE SMA REVERSE POLARIZED CRIMP JACK (FOR TIMES LMR-200)	SIZE A	FSCM NO. 99001	DWG. NO. 132236RP.DWG	REV. NC		
2 INSULATOR	TEFLON	NATURAL			CHECKED									
3 CONTACT PIN	BRASS	GOLD			ISSUED									
4 FERRULE	COPPER	GOLD												
5														
6														
7														
8									SCALE	NA	PART NO.	132236RP	SHEET	1 OF 1