


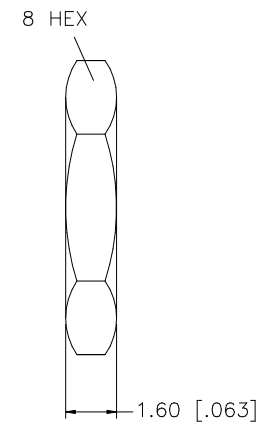


REV.	DATE	DESCRIPTION
NC	05/13/04	INITIAL RELEASE

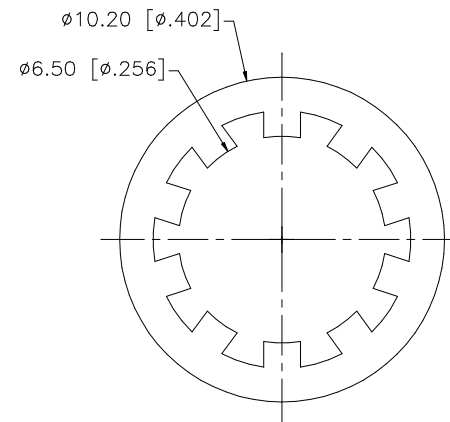

RECOMMENDED
MOUNTING HOLE

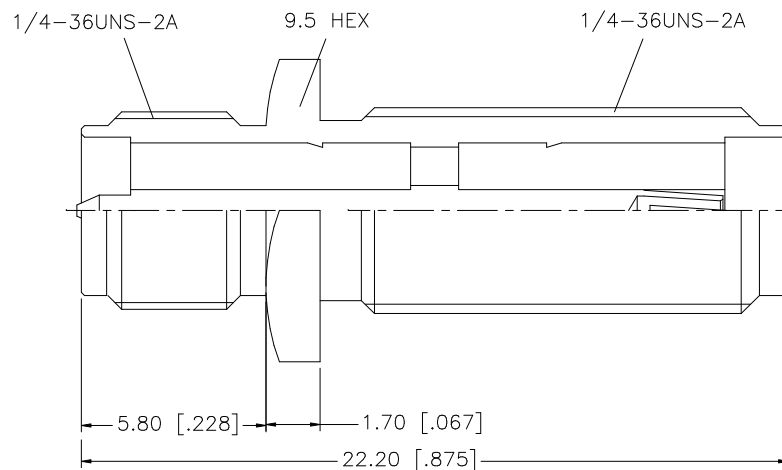

					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007” .315 – 1.180 = ± 0.015” 1.180 – 4.724 = ± 0.020” DO NOT SCALE DRAWING	APPROVALS		DATE		Amphenol Connex					
8						DRAWN	G.R.S.	05/13/04							
7						CHECKED									
6											PART DESCRIPTION				
5	HEX NUT	BRASS	GOLD	1							SMA BULKHEAD JACK TO SMA REVERSE POLARITY JACK ADAPTER				
4	LOCK WASHER	BRASS	GOLD	1							PART NO. 132170RP				
3	CONTACT PIN	BER. COPPER	GOLD	1											
2	INSULATOR	TEFLON	NATURAL	1											
1	BODY	BRASS	GOLD	1											
DESCRIPTION					MATERIAL	FINISH	QTY	CAD FILE			DWG. NO.	REV.	SIZE	SCALE	
								C:/132/132170SS.DWG			132170RP.DWG	NC	A	NA	

Amphenol Connex

PART DESCRIPTION
SMA BULKHEAD JACK TO SMA REVERSE
POLARITY JACK ADAPTER

PART NO.
132170RP