
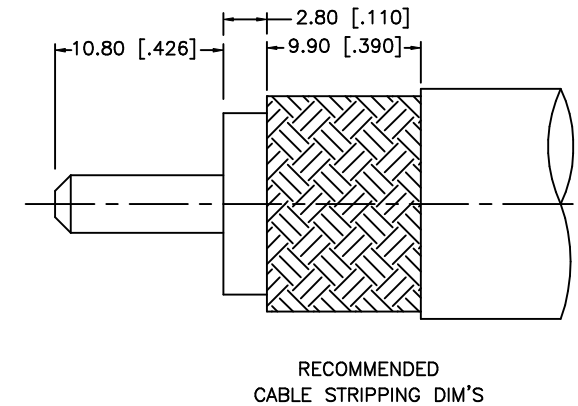
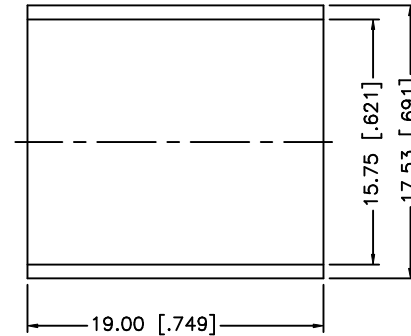


REV.	DATE	DESCRIPTION
NC	02/20/07	INITIAL RELEASE

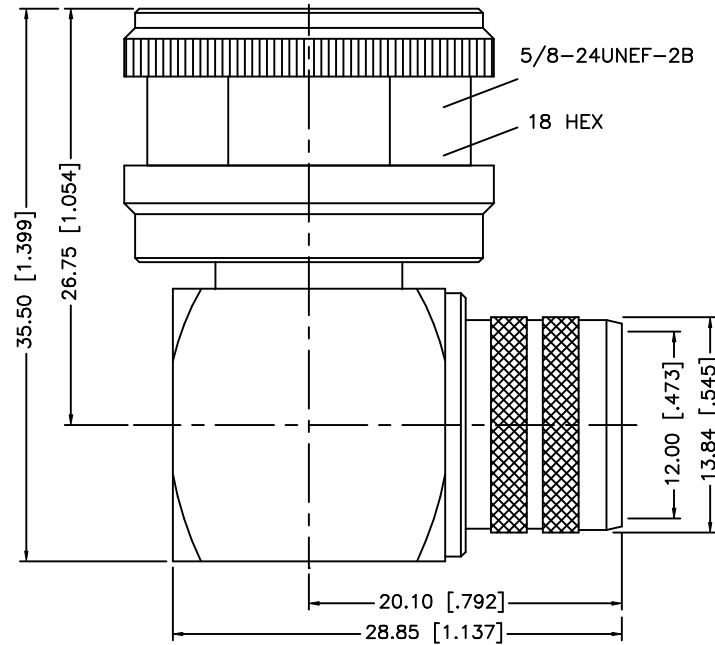

NOTE:

1. CRIMPED FERRULE HEX CRIMP SIZE .600"
2. CONTACT PIN TO SOLDER.

					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007" .315 – 1.180 = ± 0.015" 1.180 – 4.724 = ± 0.020" DO NOT SCALE DRAWING	APPROVALS		DATE		Amphenol Connex										
8						DRAWN	G.R.S.	02/20/07												
7						CHECKED														
6						ISSUED				PART DESCRIPTION										
5	FERRULE	COPPER	NEXCOTE	1							N R/A DIRECT CRIMP PLUG – SP. HEX NUT (FOR LMR–600 CABLE)									
4	COVER	BRASS	NEXCOTE	1							PART NO.									
3	CONTACT PIN	BRASS	GOLD	1							172263–10									
2	INSULATOR	TEFLON	NATURAL	1							DWG. NO.									
1	BODY	BRASS	NEXCOTE	1						SCALE										
					C:/172/172263–10.DWG					DWG. NO. 172263–10.DWG					REV. NC		SIZE A		SCALE NA	