

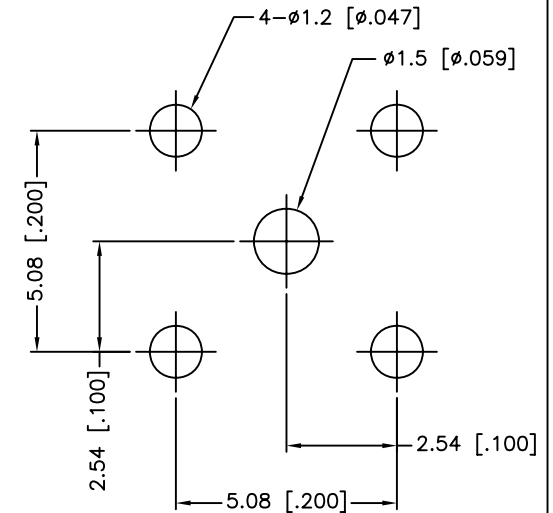
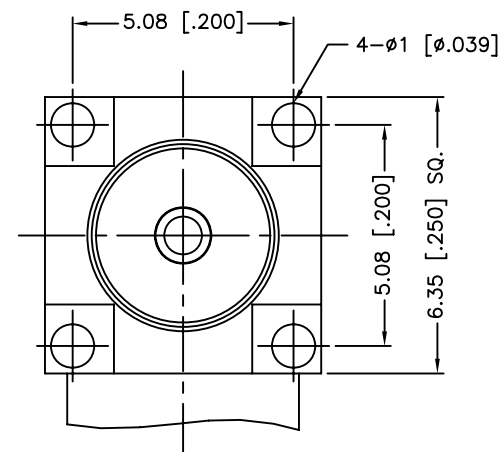


REV.	DATE	FOR NO.	DESCRIPTION
NC	01/27/00	XXXXXX	INITIAL RELEASE
A	04/30/03	XXXXXX	UPDATE DRAWING FORMAT
B	01/12/12	2271	ADD NOTES
C	08/20/12	2358	ADD NOTES

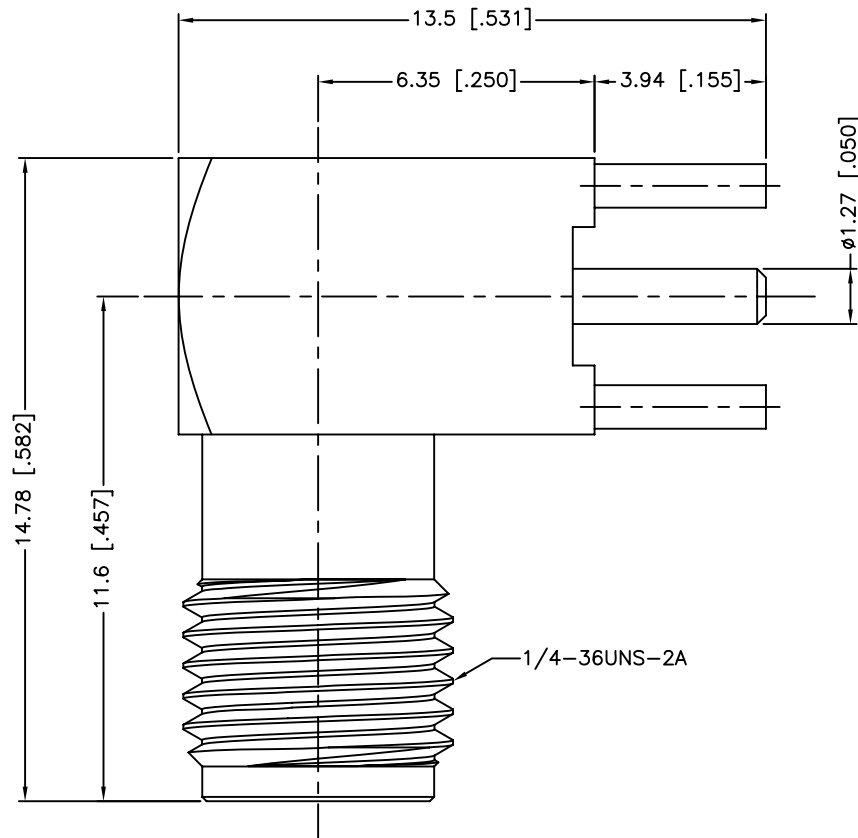

PCB MOUNTING HOLE

1. IMPEDANCE: 50 OHM
2. FREQUENCY RANGE: DC - 11 GHz
3. VSWR: 1.3 MAX.
4. DIELECTRIC WITHSTANDING VOLTAGE: 1000 VRMS, MIN.
5. DURABILITY: 500 CYCLES MIN.
6. TEMPERATURE RANGE: -65°C TO +165°C
7. SINGLE-PIECE BODY
8. SINGLE-PIECE CENTER CONTACT



UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 - 8mm ± 0.20mm 8 - 30mm ± 0.40mm 30 - 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 - .315 = ± 0.007" .315 - 1.180 = ± 0.015" 1.180 - 4.724 = ± 0.020" DO NOT SCALE DRAWING					APPROVALS		DATE		Amphenol Connex			
					DRAWN M.ZHANG		08/20/12					
					CHECKED				PART DESCRIPTION SMA R/A P.C. MOUNT JACK			
					ISSUED							
					SHEET 1 OF 1							
CAD FILE		C:/CONNEX/132225.DWG		PART NO. 132225								
DWG. NO.		132225.DWG		REV. C		SIZE A		SCALE NA				
3	CONTACT PIN	BER. COPPER	GOLD	1								
2	INSULATOR	PTFE	NATURAL	1								
1	BODY	ZINC DIECAST	GOLD	1								
	DESCRIPTION	MATERIAL	FINISH	QTY								