

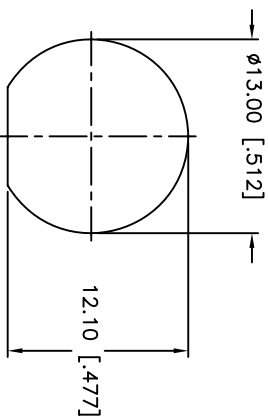
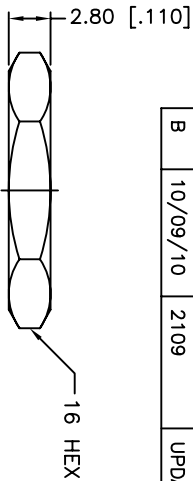

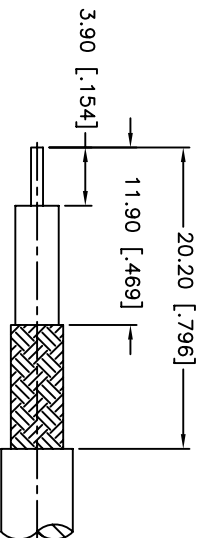
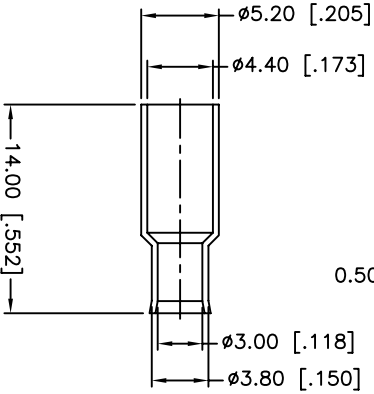



REV.	DATE	ECR NO.	DESCRIPTION
NC	04/18/00	XXXXXX	INITIAL RELEASE
A	08/13/06	XXXXXX	UPDATE DRAWING FORMAT
B	10/09/10	2109	UPDATE THE D FLAT POSITION

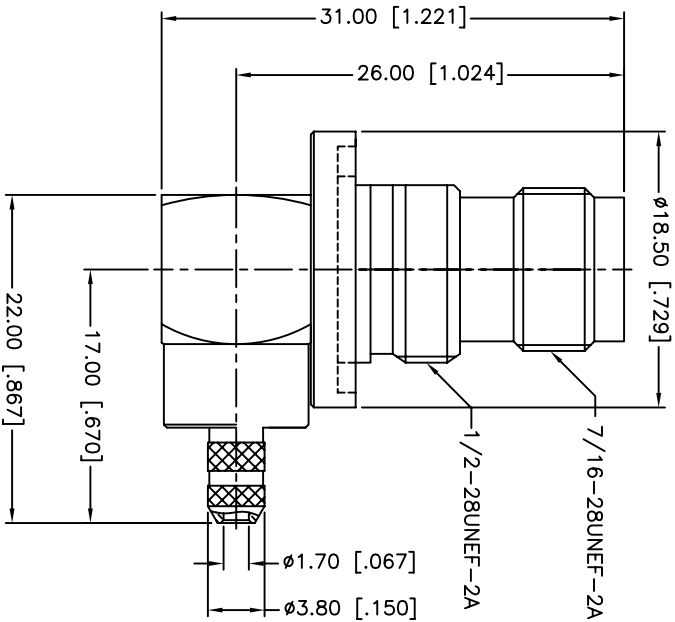

RECOMMENDED
MOUNTING HOLE



RECOMMENDED
CABLE STRIPPING DIM'S



NOTE:
1. CRIMPED FERRULE
HEX CRIMP SIZE .178"

10	NUT	BRASS	NICKEL	1	UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED, TOLERANCES FOR MILLIMETERS ARE: 0.5 - 8mm ± 0.20mm 8 - 30mm ± 0.40mm 30 - 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED, TOLERANCES FOR INCHES ARE: .020 - .315 = ± 0.007" .315 - 1.180 = ± 0.015" 1.180 - 4.724 = ± 0.020"	APPROVALS DATE 10/09/10	PART DESCRIPTION TNC R/A BULKHEAD CRIMP JACK (FOR RG-174/U,188A/U,316/U)			
9	FERRULE	BRASS	NICKEL	1						
8	HEX NUT	BRASS	NICKEL	1						
7	LOCK WASHER	BRASS	NICKEL	1						
6	GASKET	RUBBER	RED	1						
5	CONTACT PIN	PHOSPHOR BRONZE	GOLD	1						
4	BODY	BRASS	NICKEL	1						
3	INSULATOR	PTFE	NATURAL	1						
2	HOUSING	BRASS	NICKEL	1						
1	BARREL	BRASS	NICKEL	1						
DESCRIPTION		MATERIAL	FINISH	QTY	DO NOT SCALE DRAWING	CAD FILE C:/CONNEX/122454.DWG	DWG. NO. 122454.DWG	REV. B	SIZE A	SCALE NA

Amphenol Connex

122454