
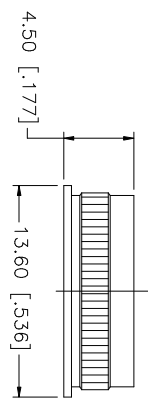
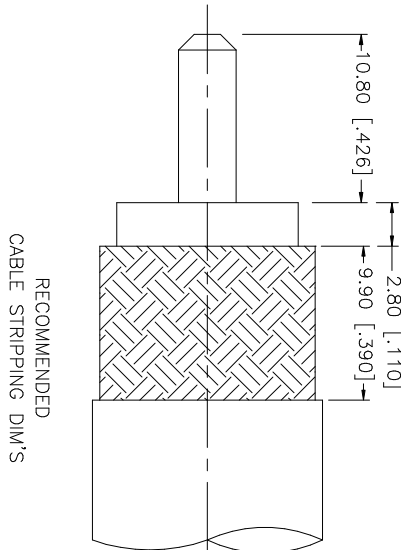
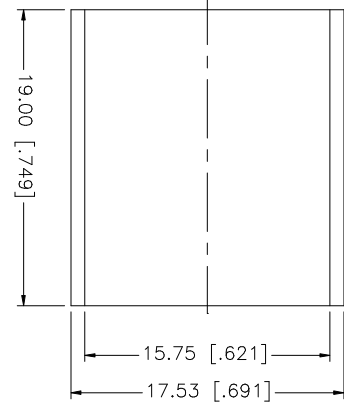


REV.	DATE	DESCRIPTION
NC	05/04/00	INITIAL RELEASE
A	02/11/06	UPDATE DRAWING FORMAT

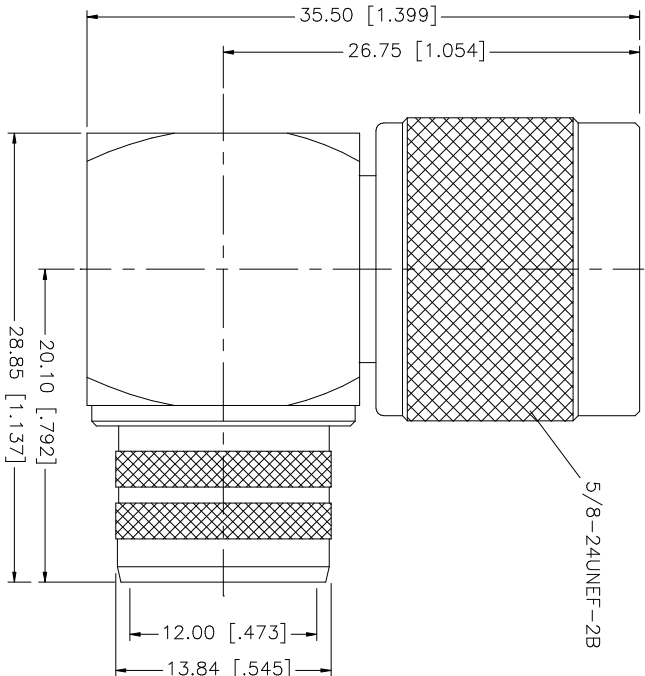

- NOTE:
1. CRIMPED FERRULE
HEX. CRIMP SIZE .600"
 2. CONTACT PIN TO SOLDER.

					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN () ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.	
					UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE:	
6					0.5 – 8mm ± 0.20mm	
5	FERRULE	COPPER	NEXCOTE	1	8 – 30mm ± 0.40mm	
4	COVER	BRASS	NEXCOTE	1	30 – 120mm ± 0.50mm	
					UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE:	
3	CONTACT PIN	BRASS	GOLD	1	.020 – .315 = ± 0.007"	
2	INSULATOR	TEFLON	NATURAL	1	.315 – 1.180 = ± 0.015"	
1	BODY	BRASS	NEXCOTE	1	1.180 – 4.724 = ± 0.020"	
DESCRIPTION					MATERIAL	
					FINISH	
					QTY	
DO NOT SCALE DRAWING						
CAD FILE					C:/172/172263.DWG	
DWG. NO.					172263.DWG	
REV.					A	
SIZE					A	
SCALE					NA	

APPROVALS		DATE
DRAWN	G.R.S.	02/11/06
CHECKED		
ISSUED		
SHEET	1 OF 1	

PART DESCRIPTION	
N R/A DIRECT CRIMP PLUG (FOR LMR-600 CABLE)	
172263	

Amphenol Connex