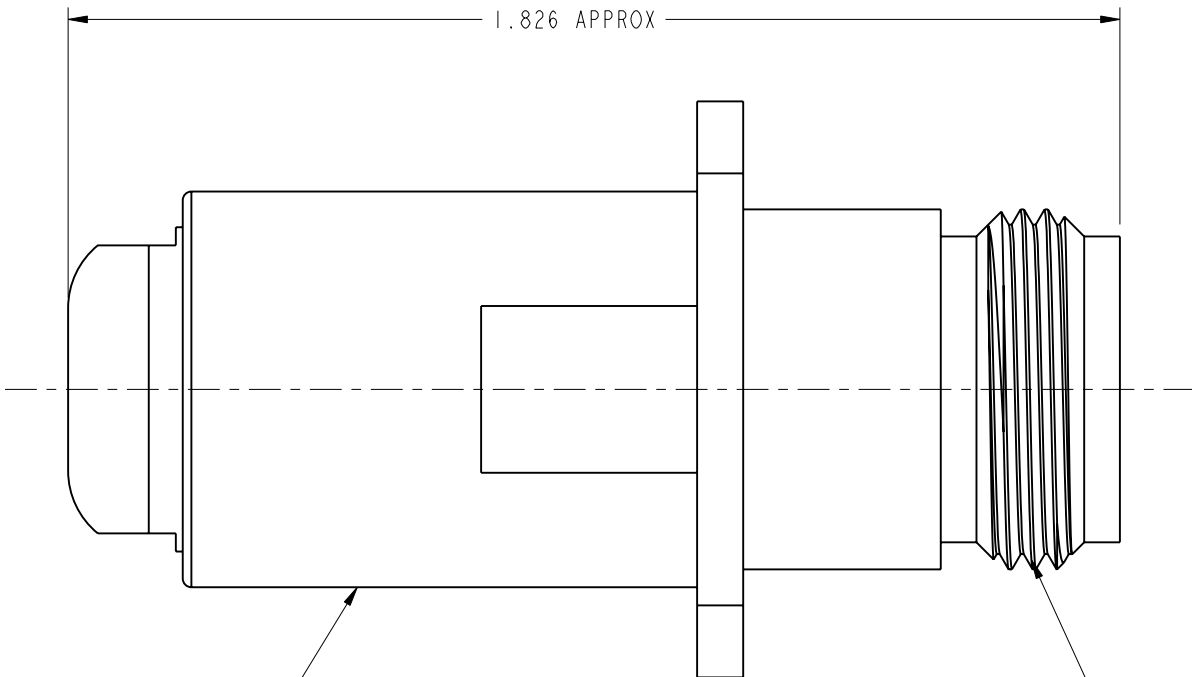
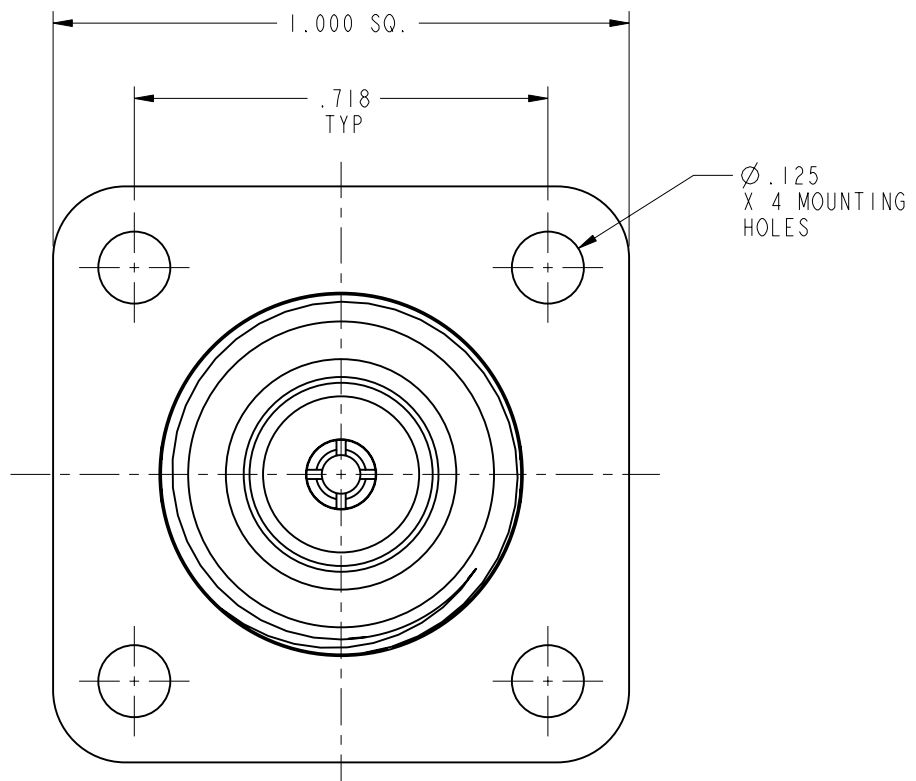


NOTES:		36000		REVISIONS			
1. MATERIALS AND FINISHES:		DRAWING NO.	REV	DESCRIPTION	DATE	ECO	APPR
BODY ASSY, CALMP NUT (2), WASHER, BUSHING - BRASS, NICKEL PLATING (.000100 MIN THICK)		THIRD ANGLE PROJ.	--	RELEASE TO MFG.			
CONTACT - BeCu, SILVER PLATING (.000200 MIN THICK)			H	SEE SHEET 1	12/4/06	46341	CPM
INSULATOR - COPOLYMER OF STYRENE							
GASKET - SYNTHETIC RUBBER							
2. ELECTRICAL:							
A. IMPEDANCE: 50 OHM							
B. FREQUENCY RANGE: DC - 11 GHz							
C. VSWR(RETURN LOSS): 1.3 (17.7 dB), MAX.							
D. DIELECTRIC WITHSTANDING VOLTAGE: 2500 VRMS, MIN.							
3. MECHANICAL:							
A. TEMPERATURE RANGE: -55° C TO +85° C							
4. PACKAGING:							
A. QUANTITY: SINGLE PACK							
B. MARKING: BAG TO BE MARKED							
"AMPHENOL, 36000, AND DATE CODE"							
							
STAMP "74868 UG-1052/U"				.625-24 NEF-2A THREAD			