
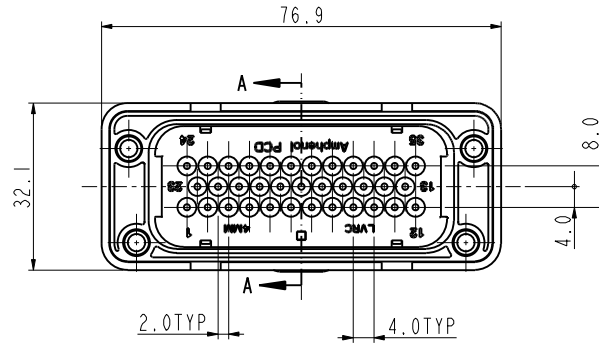



C-LVRCM35SCF




Amphenol PCD SZ
ORIGINAL
PDF Format
R&D

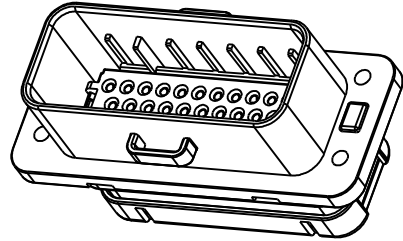

安费诺精密连接器(深圳)有限公司
Amphenol PCD Shenzhen


受控文件

2018 年 1月24日

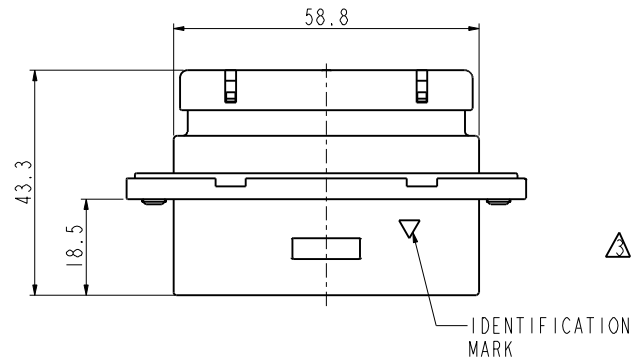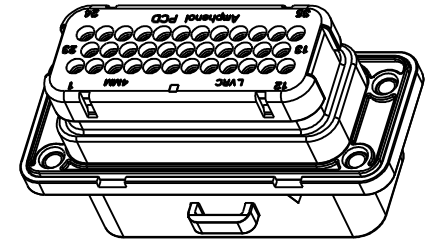


NOTES:

- 1.MATE CONTACT:C310023102, PLEASE ORDER SEPARATELY.
- 2.MATE CONNECTOR P/N: LVRCF35PC.
- △ THE GRAY HOUSING CANNOT BE INSERTED INTO SHELL DEEPER BEFORE INSTALL CONTACTS.
- 4.ROHS COMPLIANCE.
- 5.ADD 13 AND 23 HOLE MARKS,ADD 22AWG WIRE & PICK UP 14AWG WIRE CURRENT AND MAX NUMBER OF HOLES.

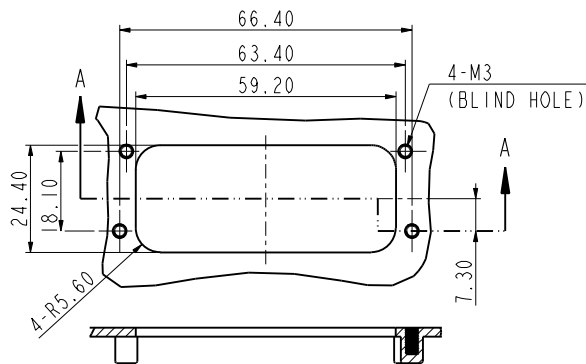

SECTION A-A

MOUNTING INTERFACE SPECIFICATION
1.5MM MINIMUM THICKNESS

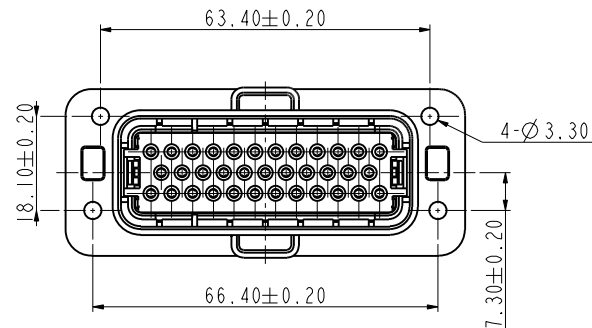

TECHINICAL DATA		SPECIAL CHARACTERISTICS SYMBOL
VOLTAGE RATING	250V	+
CURRENT RATING	8A(22~16AWG) 13A(14AWG,6POS LOADED MAX.)	+
WIRE RANGE	22-14AWG WIRE INSULATION OD: 1.7-2.7MM	⊙
WATERPROOF (MATED CONDITION)	IP 67	+
OPERATION TEMP.	-40-125°	⊙
MAX MATING CYCLES	50 TIMES	⊙

DIMENSIONS	TOLERANCES	PROJECTION
ANSI Y14.5M	.X ±0.5	
UNITS: MM	.XX ±0.05	
Pro/E FILE	ANGLES ±2.0°	
ORIGINAL	THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION WHICH IS THE CONFIDENTIAL PROPERTY OF AMPHENOL PCD SHENZHEN	

Amphenol Pcd Shenzhen

ENGR

LUIK. PENG

Aug- 31- 17

CHKD

APPD

TITLE

SOCKET OF 35 PIN CONNECTOR
FRONT ASSEMBLY STYLE

SIZE

A3

DWG NO.

C-LVRCM35SCF

REV

C


CODE: 58982

SCALE: 1:1

SHEET 1 OF 2

C-LVRCM35SCF

C-LVRCM35SCF

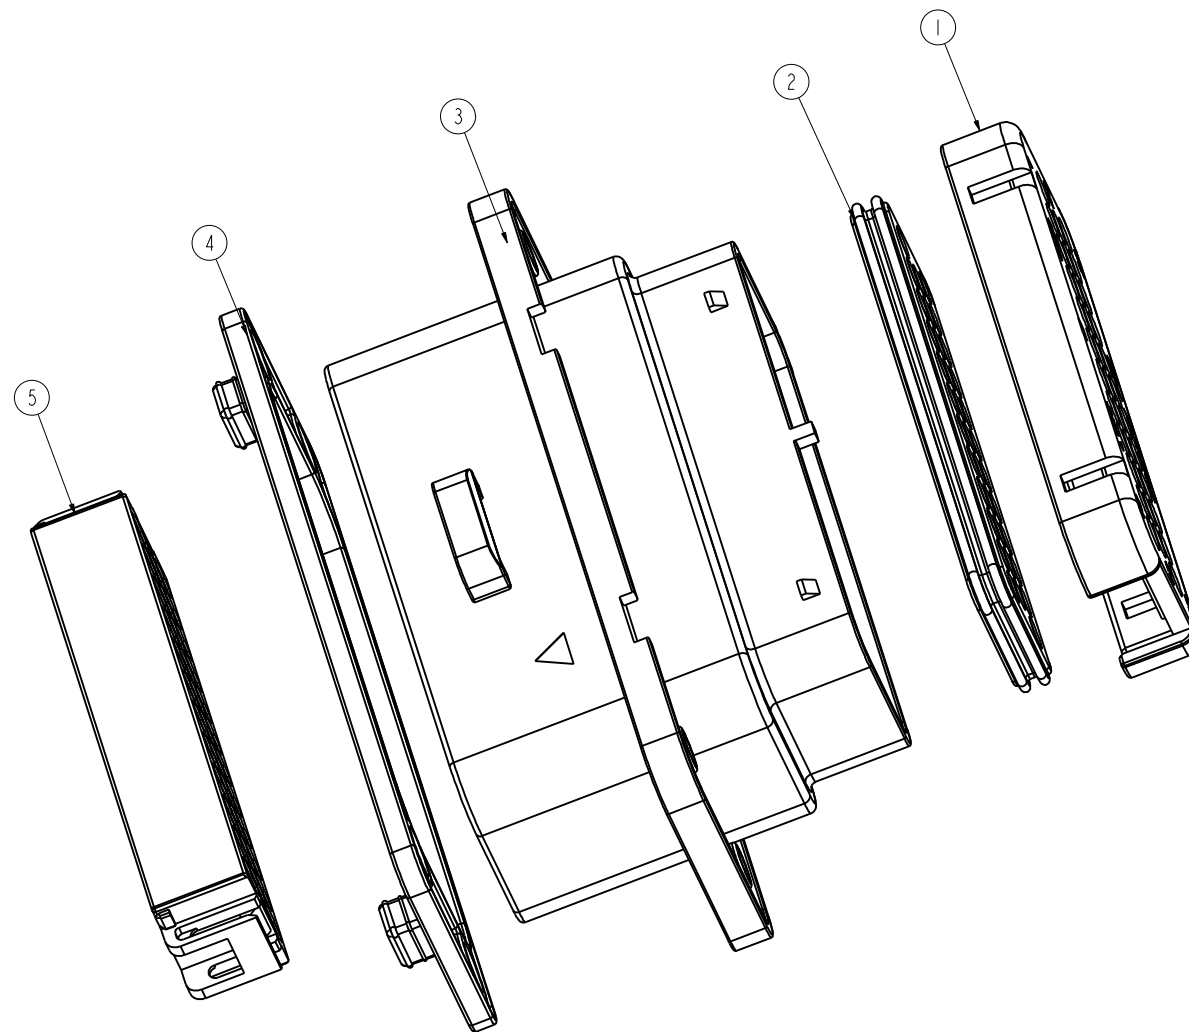

LVRCM35SCF	5	C220011208	INSERT HOUSING,PA66 GRAY	1
	4	C270011203	FLAT RUBBER OF SOCKET, BLACK	1
	3	C220011206	HOUSING,PA66 BLACK	1
	2	C270011201	RUBBER,SR RED	1
	1	C220011204	COVER,PA66 BLACK	1
P/N	ITEM	COMPONENT P/N	DESCRIPTION	QTY

SIZE	DWG NO.	REV
A3	C-LVRCM35SCF	C
CODE: 58982	SCALE: 2:1	SHEET 2 OF 2