


Coaxial Panel Connector  
23\_SMA-50-0-3/111\_N

Description

Straight panel receptacle jack, flange mount

Interface standards  
IEC 60169-15\_MIL-STD-348A/310\_CECC 22110

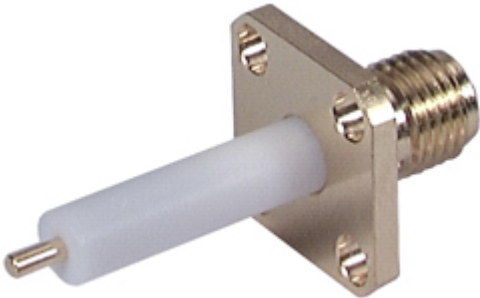

Technical Data

Electrical Data

Impedance 50 Ω  
Interface frequency max. 18 GHz

Mechanical Data

Number of matings 500  
Weight 0.0032 kg

Environmental Data

Operating temperature -65 °C to 125 °C  
2011/65/EU (RoHS - including 2015/863 and 2017/2102) compliant

Material Data

| Piece Parts    | Material               | Surface Plating                   |
|----------------|------------------------|-----------------------------------|
| Centre contact | Copper Beryllium Alloy | Gold Plating (Nickel underplated) |
| Outer contact  | Copper Beryllium Alloy | Gold Plating (Nickel underplated) |
| Body           | Copper Beryllium Alloy | Gold Plating (Nickel underplated) |
| Insulator      | PFA / PTFE             |                                   |

Related Documents

Catalogue drawing DCA-00011155

Ordering Information

Single package 23\_SMA-50-0-3/111\_NE