



NOTES:

1. MATERIALS AND FINISHES:
BODY – BRASS, NICKEL
CONTACT – BRASS,SILVER PLATING
INSULATOR – PTFE, NATURAL
2. ELECTRICAL:
A. IMPEDANCE: 50 OHM
B. FREQUENCY RANGE: DC 0–4 GHz
C. DIELECTRIC WITHSTANDING VOLTAGE: 1500 VRMS, MIN.
3. MECHANICAL:
A. DURABILITY: 500 CYCLES MIN.
B. TEMPERATURE RANGE: – 65°C to +165°C





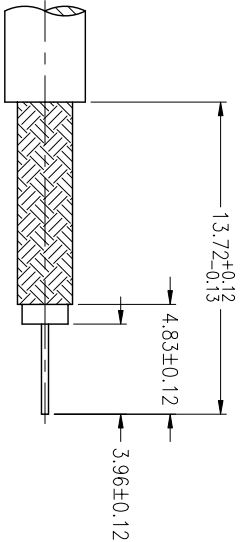


RECOMMENDED
CABLE STRIPPING DIM'S


THIRD ANGLE PROJ.					REVISIONS			
REV	DESCRIPTION	DATE	ECO	APPR				
A1	SHELL WAS CHANGED	19-Feb-04						
A2	QTY OF BRAID CLAMP, BUSHING WERE CHANGED	23-Apr-04						
B	BODY-SA WAS CHANGED	27-Jul-04						
C	SHELL WAS CHANGED	26-Feb-08		AW				
R	SPRING WAS CHANGED	23-Dec-10	47967	SH				

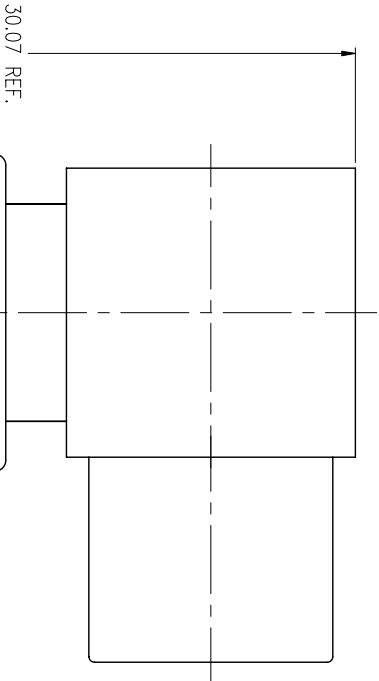

30.07 REF.

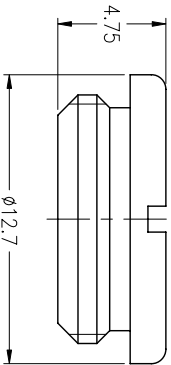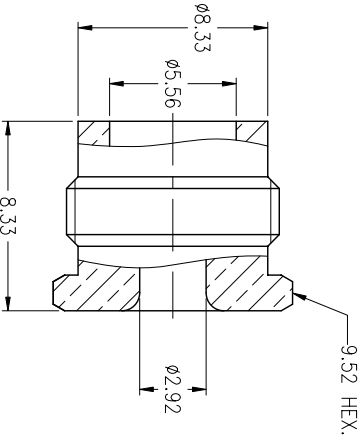

STAMP "AMPHENOL 33275"

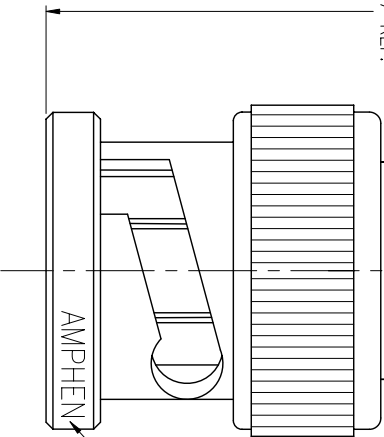

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN METRIC AND TOLERANCES ARE:
<0.5mm ±0.05mm 0.5 – 6mm ±0.1mm 6 – 30mm ±0.2mm 30 – 120mm ±0.3mm ANGLES ±1°

NOTICE – These drawings, specifications, or other data (1) are, and remain the property of Amphenol Corp. (2) must be returned upon request, and (3) are confidential and not to be disclosed to any person without the written consent of Amphenol Corp. The furnishing of these drawings or other data by Amphenol Corp., or to any other person in any manner, licensing, granting rights or permitting such holder or any other person to manufacture, use or sell any product, process or design, patented or otherwise, that may in any way be related to or disclosed by said drawings, specifications, or other data.

MATERIAL	DRAWN	DATE	TITLE BNC ANGLE PLUG FOR RG174&188/U			Amphenol RF Danbury CT USA, Tainon Taiwan, Shenzhen China www.amphenolrf.com		
	T.DENG	21-Dec-10						
	ENGINEER	DATE						
REFERENCE	S.LI	21-Dec-10	DRAWING NO. 33275			ITEM NO. 33275		
	APPROVED	DATE						
	S.HSIEH	23-Dec-10						
FINISH	CAD FILE		SCALE: 3/1	SHEET	2 OF 2	PART NO. 33275		
	F:\DWG\CMPD\33275-RSZ		DWG SIZE	CODE ID	REV			
			B	74868	R			

CUSTOMER OUTLINE DRAWING
ALL OTHER SHEETS ARE FOR INTERNAL USE ONLY