
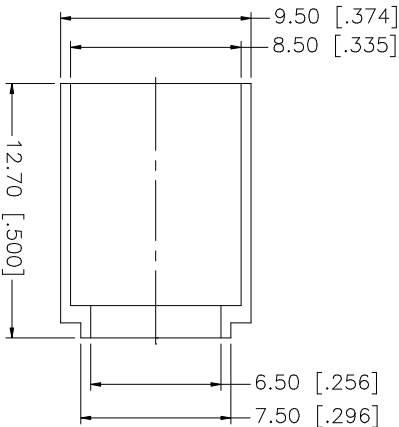
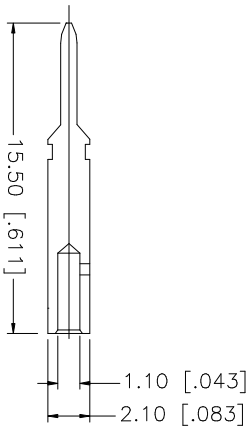
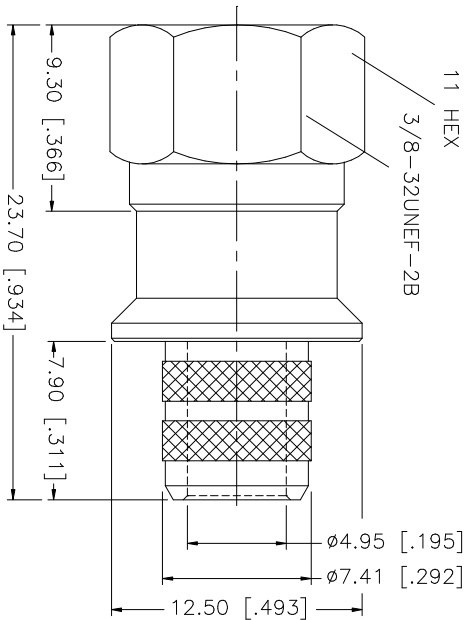


REV.	DATE	DESCRIPTION
NC	04/14/04	INITIAL RELEASE

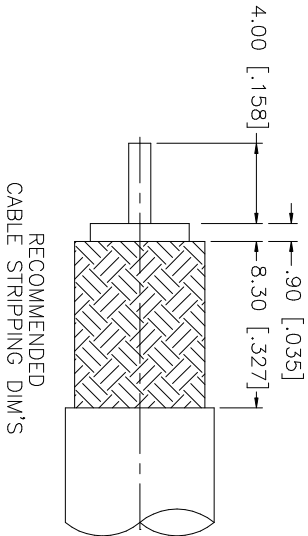

CRIMP NOTES:

1. CRIMPED FERRULE
HEX CRIMP SIZE .324"
2. CRIMPED CONTACT PIN
HEX CRIMP SIZE .068"

					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.	APPROVALS	DATE	Amphenol Connex F CRIMP PLUG (FOR BELDEN 1695A CABLE) 222171							
8						DRAWN	G.R.S.		04/14/04						
7						UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 - 8mm ± 0.20mm 8 - 30mm ± 0.40mm 30 - 120mm ± 0.50mm	CHECKED								
6							ISSUED								
5							SHEET		1 OF 1						
4	FERRULE	BRASS	NICKEL	1	UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 - .315 = ± 0.007" .315 - 1.180 = ± 0.015" 1.180 - 4.724 = ± 0.020"	PART NO.		222171							
3	CONTACT PIN	BRASS	GOLD	1		PART NO.		222171							
2	INSULATOR	DELIRIN	NATURAL	1		PART NO.		222171							
1	BODY	BRASS	NICKEL	1		PART NO.		222171							
	DESCRIPTION	MATERIAL	FINISH	QTY	DO NOT SCALE DRAWING	CAD FILE	C:/222/222171.DWG	DWG. NO.	222171.DWG	REV.	NC	SIZE	A	SCALE	NA