

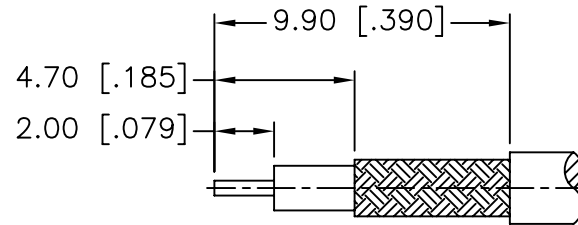
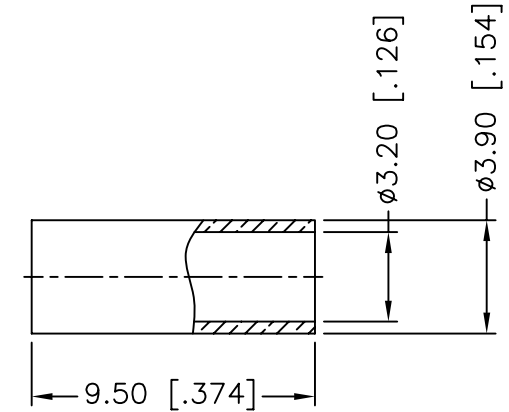
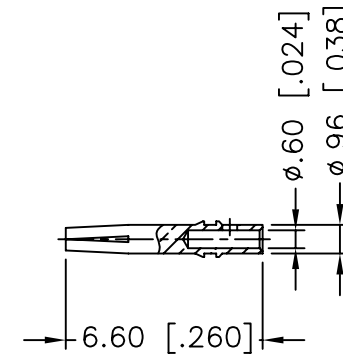


REV.	DATE	ECR NO.	DESCRIPTION
NC	08/23/10	XXXXXX	INITIAL RELEASE
A	10/07/10	2107	CHANGE THE CABLE TO RG179,187/U

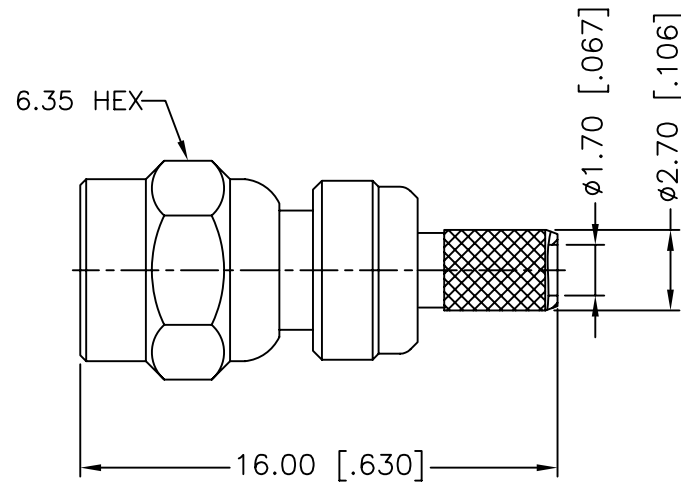

RECOMMENDED
CABLE STRIPPING DIM'S

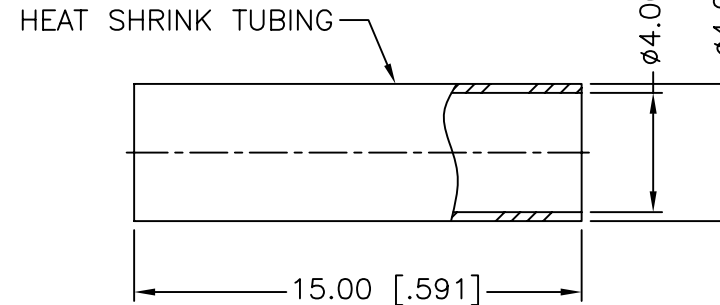

- NOTES:
1. CRIMPED FERRULE
HEX CRIMP SIZE .128"
 2. CONTACT PIN TO SOLDER

8	HEAT SHRINK TUBING		BLACK	1
7	FERRULE	BRASS	GOLD	1
6	CONTACT PIN	BERYLLIUM COPPER	GOLD	1
5	BARREL	BRASS	GOLD	1
4	INSULATOR	PTFE	NATURAL	1
3	INSULATOR	PTFE	NATURAL	1
2	BODY	BRASS	GOLD	1
1	SHELL	BRASS	GOLD	1
	DESCRIPTION	MATERIAL	FINISH	QTY

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.
UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 - 8mm ± 0.20mm 8 - 30mm ± 0.40mm 30 - 120mm ± 0.50mm
UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 - .315 = ± 0.007" .315 - 1.180 = ± 0.015" 1.180 - 4.724 = ± 0.020"
DO NOT SCALE DRAWING

APPROVALS	DATE
DRAWN M.ZHANG	10/07/10
CHECKED	
ISSUED	
SHEET 1 OF 1	
CAD FILE C:/CONNEX/152101-75.DWG	

Amphenol Connex			
PART DESCRIPTION			
MINI 75 OHM SMC CRIMP PLUG (FOR RG-179/U, 187/U CABLE)			
PART NO.			
152101-75			
DWG. NO.	152101-75.DWG	REV.	A
SIZE	A	SCALE	NA