
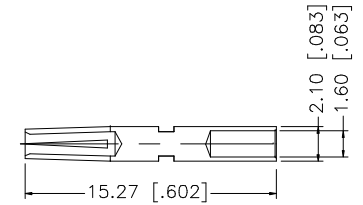
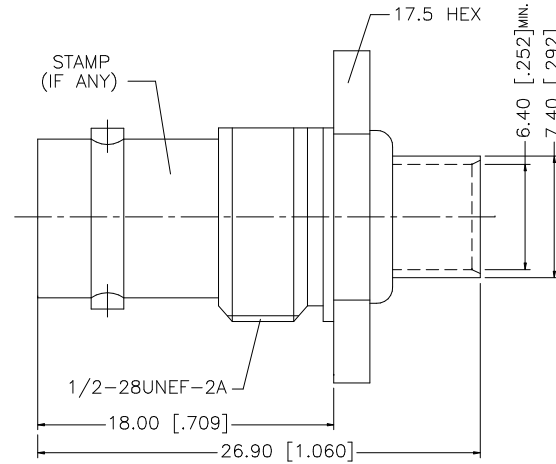


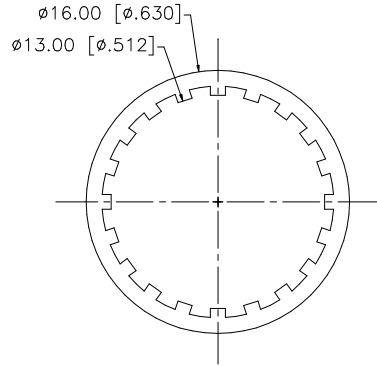
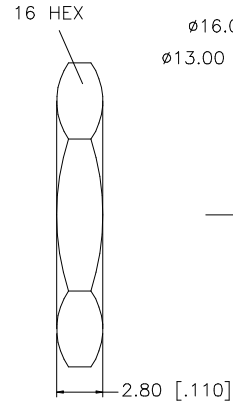


REV.	DATE	DESCRIPTION
NC	02/21/03	INITIAL RELEASE



NOTE:

1. CONTACT PIN TO SOLDER

					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007” .315 – 1.180 = ± 0.015” 1.180 – 4.724 = ± 0.020” DO NOT SCALE DRAWING	APPROVALS		DATE		Amphenol Connex								
8						DRAWN	G.R.S.	02/21/03										
7						CHECKED												
6	HEX NUT	BRASS	NICKEL	1			ISSUED				PART DESCRIPTION							
5	LOCK WASHER	BRASS	NICKEL	1							BNC BULKHEAD DIRECT SOLDER JACK (FOR .250” SEMI-RIGID CABLE)							
4	GASKET	RUBBER	RED	1							PART NO.							
3	CONTACT PIN	PHOS. BRONZE	GOLD	1							112714							
2	INSULATOR	TEFLON	NATURAL	1														
1	BODY/HOUSING	BRASS	NICKEL	1														
	DESCRIPTION	MATERIAL	FINISH	QTY			CAD FILE	C:/122/122489.DWG		DWG. NO.	112714.DWG		REV.	NC	SIZE	A	SCALE	NA