



REV.	DATE	ECR NO.	DESCRIPTION
NC	06/01/09	XXXXXX	INITIAL RELEASE
A	12/09/13	2670	CHANGE BODY MATERIAL TO BERYLLIUM COPPER, CHANGE SPACER I.D., UPDATE DRAWING FORMAT

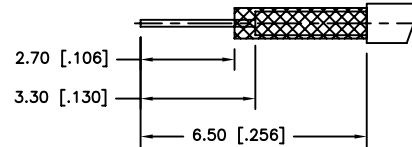

RECOMMENDED
CABLE STRIPPING DIM'S

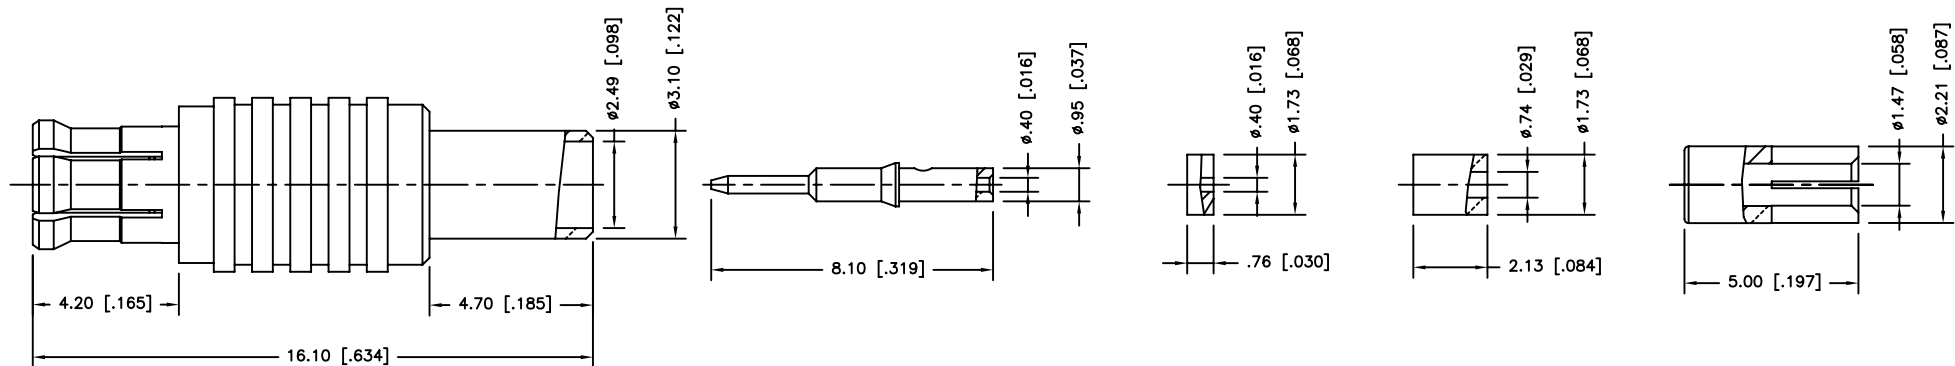

1. IMPEDANCE: 50 OHM
2. FREQUENCY RANGE: 0–6 GHZ
3. DIELECTRIC WITHSTANDING VOLTAGE: 1000 VRMS, MIN.
4. DURABILITY: 500 CYCLES MIN.
5. TEMPERATURE RANGE: –65°C TO +165°C
6. CRIMPED FERRULE
HEX. CRIMP SIZE .105"
7. CONTACT PIN CAN BE SOLDERED
OR USE 4-WAY INDENT TOOL #47025

					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 6mm ± 0.05mm 6 – 30mm ± 0.10mm 30 – 120mm ± 0.20mm ANGLES ± 1° UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: <.020 ± 0.002" .020 – .236 = ± 0.004" .236 – 1.180 = ± 0.007" 1.180 – 4.724 = ± 0.012" ANGLES ± 1° DO NOT SCALE DRAWING	APPROVALS		DATE		Amphenol Connex						
8	INNER FERRULE	BRASS	GOLD	1		DRAWN	M.ZHANG	12/09/13								
7	SLEEVE	BRASS	GOLD	1		CHECKED			PART DESCRIPTION MCX CRIMP PLUG (FOR 1.32 MM CABLE)							
6	INSULATOR	PTFE	NATURAL	1		ISSUED										
5	CONTACT PIN	BRASS	GOLD	1		SHEET	1 OF 1									
4	HOUSING	BRASS	GOLD	1					PART NO.			252198				
3	INSULATOR	PTFE	NATURAL	1												
2	INSULATOR	PTFE	NATURAL	1							DWG. NO.					
1	BODY	BERYLLIUM COPPER	GOLD	1							252198.DWG					
					CAD FILE			C:/CONNEX/252198.DWG			REV.	A	SIZE	A	SCALE	NA