



NOTES:

1. MATERIALS OF CONSTRUCTION:
BODY & BARREL = BRASS, GOLD PLATING
FERRULE = COPPER, NICKEL PLATING
CONTACT = BeCu, GOLD PLATING
NUT = BRASS, NICKEL PLATING
INSULATOR = PTFE
2. CRIMP WITH AMPHENOL TOOL 227-944 (M22520/5-01) AND DIE SET 227-1221-03, CAVITY 'A' (M22520/5-03, CLOSURE 'A'); OR WITH AMPHENOL COMMERCIAL TOOL CTL-1 (.128 HEX).
3. RECOMMENDED TORQUE: 5 IN.LBS


102-913-06

REVISIONS


DRAWING NO.	REV	DESCRIPTION	DATE	ECO	APPR
THIRD ANGLE PROJ.	A	RELEASE TO MFG.	1/21/00	43230	CPM
	B	4 MAX WAS 0.4 MAX & ADDED NOTE 3	6/11/07	46570	HH

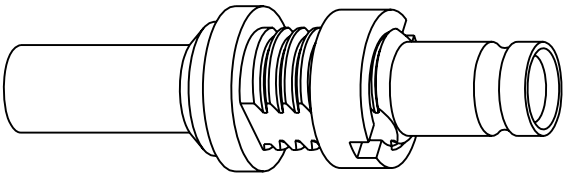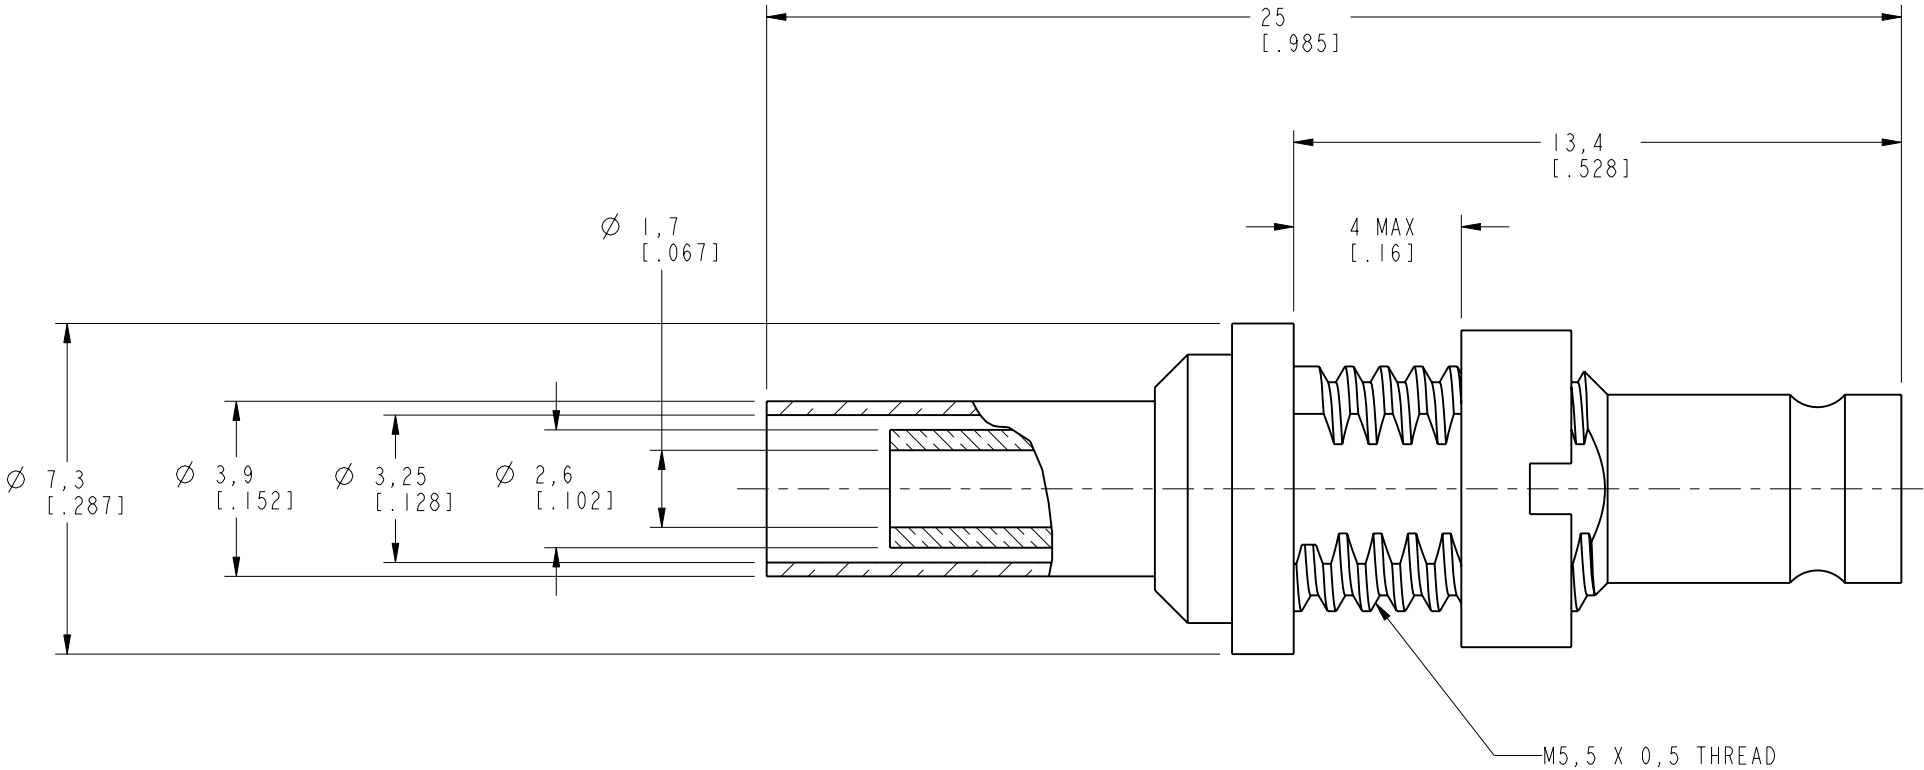

SCALE 3.000

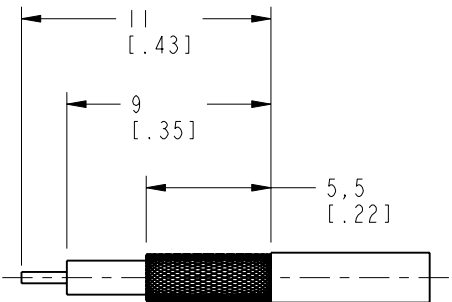

RECOMMENDED
CABLE STRIPPING DIM'S.
SCALE 3.000

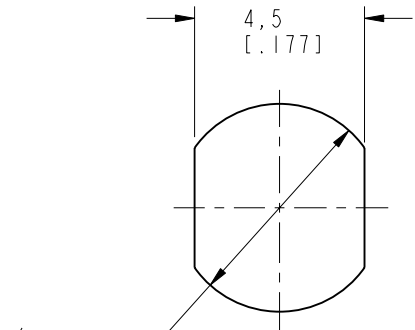

RECOMMENDED
MOUNTING HOLE DIM'S.
SCALE 5.000

CUSTOMER OUTLINE DRAWING
ALL OTHER SHEETS ARE FOR INTERNAL USE ONLY

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MM (INCHES) AND TOLERANCES ARE: 0.5 - 6mm ±0.2mm 6 - 30mm ±0.4mm 30 - 120mm ± 0.6mm	MATERIAL	DRAWN C. McGRATH	DATE 12-Jan-00	TITLE 1.0/2.3 JACK FOR RG 316 CABLE		Amphenol Amphenol Corporation Communication and Network Products Division Danbury, CT U.S.A. 06810		
	REFERENCE GEN# 102-913-06_ASSM	ENGINEER T. AUBIN	DATE 12-Jan-00					
		APPROVED T. AUBIN	DATE 19-Jan-00					
		CAD FILE I:\1023\102-913-06		CODE ID 74868	DWG SIZE B	DRAWING NO. 102-913-06		REV B