



THIRD ANGLE PROJ.		REVISIONS			
REV	DESCRIPTION	DATE	ECO	APPR	
--	RELEASE TO MFG.	-----	-----	-----	
P	ADDED SHEET 2	2/18/00	43266	CPM	
R	BODY AND BUSHING WERE CHANGED	03-Jun-11	48613	SH	
T	STAMPING WAS CHANGED RD-DMI106280IT1	02-Jul-11	48663	SH	
U	ADDED NOTE 4. 5/8-24UNEF-2A WAS 5/8-24UNEF	12-May-14	49957	SH	
V	INNER GASKET CHANGE TO WHITE RD-DMI405210IM3	16-Jun-14	50031	SH	

NOTES:

- MATERIALS AND FINISHES:
BODY, HEX NUT & BUSHING - BRASS, NICKEL PLATED
CONTACT - BERYLLIUM COPPER, SILVER PLATED
INSULATORS - CO-POLYMER OF STYRENE
GASKET - SILICONE RUBBER, COLOR RED & WHITE
- ELECTRICAL:
A. IMPEDANCE: 50 OHM
B. DIELECTRIC WITHSTANDING VOLTAGE: 2500 VRMS, MIN.
- MECHANICAL:
A. DURABILITY: 500 CYCLES MIN.
B. TEMPERATURE RANGE: -65°C to +165°C
- PACKAGING:
A. QUANTITY: SINGLE PACK
B. MARKING: BAG TO BE MARKED "AMPHENOL RF, 82-66, AND DATE CODE"

AMPHENOL UG-30/U

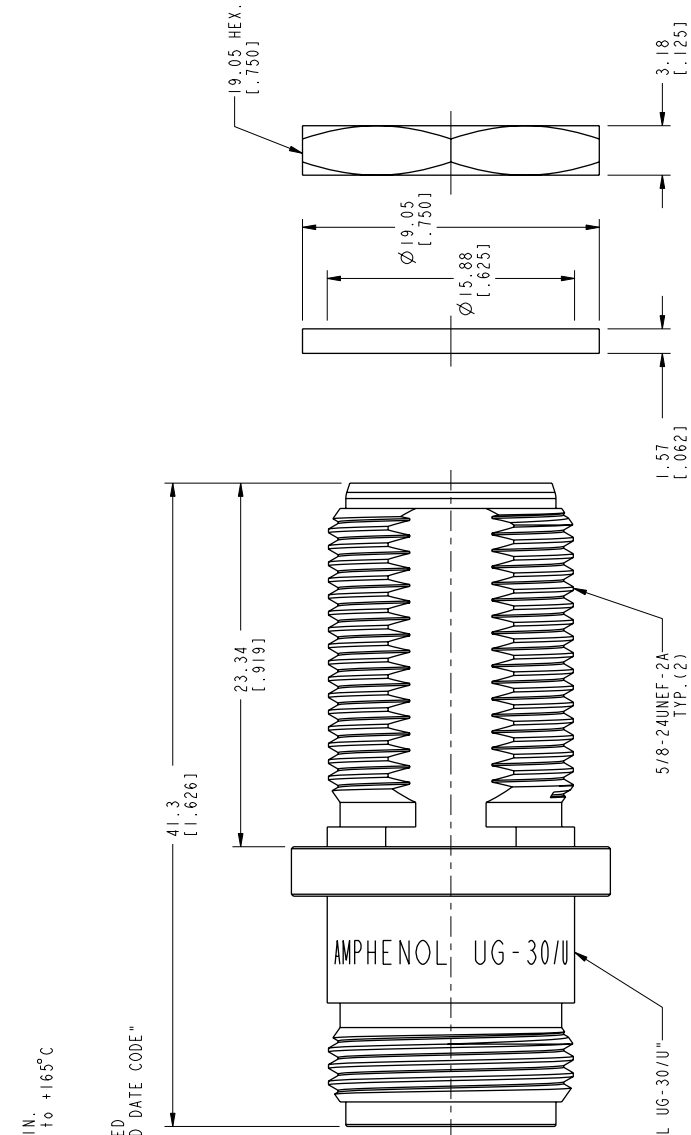

CUSTOMER OUTLINE DRAWING

ALL OTHER SHEETS ARE FOR INTERNAL USE ONLY

TITLE		DRAWN		DATE		MATERIAL	
'N' JACK/JACK, ADAPTER		M. DONG		16-Jun-14			
WATER TIGHT		D. ROYCE		10/19/92			
SCALE: 3.0:1.0		S. HSIEH		16-Jun-14			
DWG. SIZE		REV		SHEET		PART NO.	
B		V		2 OF 2		82-66	