

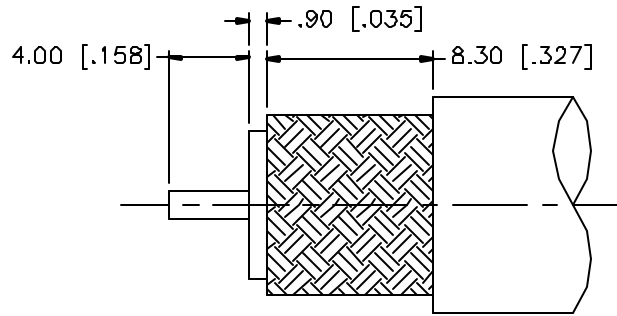
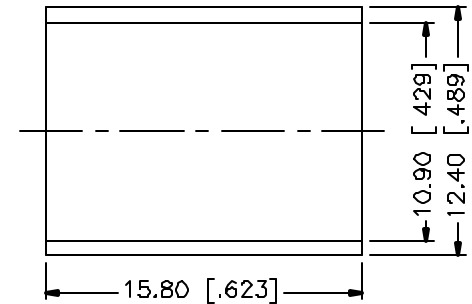


REV	DATE	DESCRIPTION
NC	02/12/01	INITIAL RELEASE

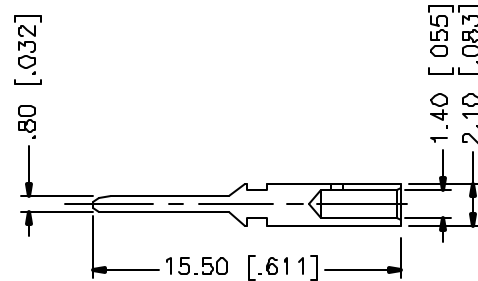

RECOMMENDED CABLE
STRIPPING DIMENSIONS

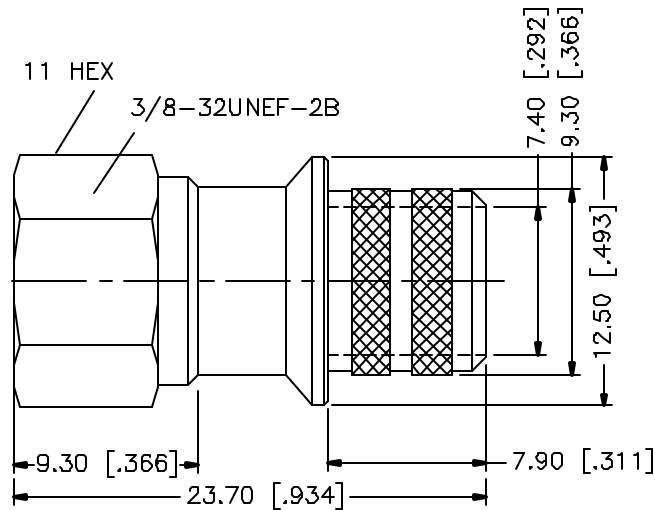

CRIMP NOTES:

1. CRIMPED FERRULE
HEX CRIMP SIZE .429"
2. CRIMPED CONTACT PIN
HEX CRIMP SIZE .068"

				UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS	APPROVALS	DATE	 Connector Corporation								
8					DRAWN	G.R.S.						02/12/01			
7					CHECKED										
6				DIMENSIONS IN [] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY			TITLE F CRIMP PLUG (FOR RG-11 CABLE)								
5	FERRULE	BRASS	NICKEL	UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE 0.5-5 = ± 0.2 6-30 = ± 0.4 30-120 = ± 0.6 120-315 = ± 1 315-1000 = ± 1.6 1000-2000 = ± 2.4	ISSUED							SIZE	FSCM NO.	DWG. NO.	REV.
4	BARREL	BRASS	NICKEL									A	99001	222175.DWG	NC
3	CONTACT PIN	BRASS	GOLD												
2	INSULATOR	DELRIN	NATURAL												
1	BODY	BRASS	NICKEL												
	DESCRIPTION	MATERIAL	FINISH	DO NOT SCALE DRAWING			SCALE	NA	PART NO.	222175	SHEET	1 OF 1			