



REV.	DATE	FOR NO.	DESCRIPTION
NC	10/26/10	XXXXXX	INITIAL RELEASE

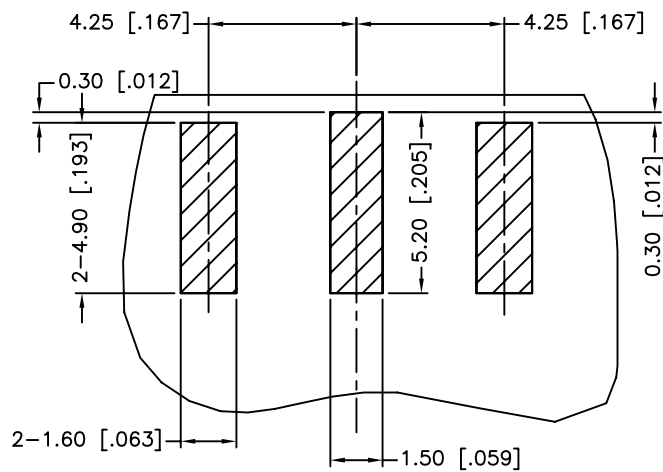


TOP VIEW


RECOMMENDED PCB LAYOUT

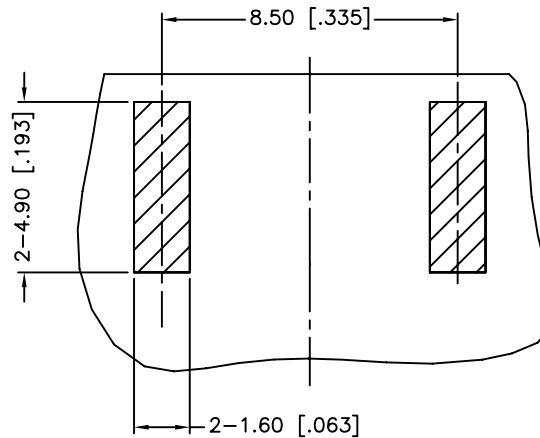




BOTTOM VIEW

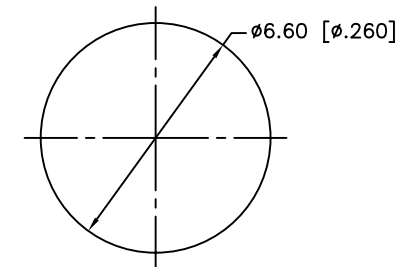

RECOMMENDED MOUNTING HOLE

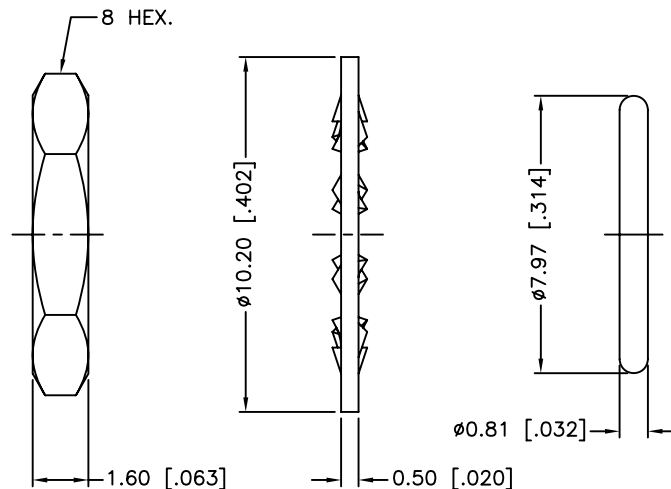

1. BOARD THICKNESS=1.57 MM [.062"]
2. MAX. PANEL THICKNESS=3.5mm

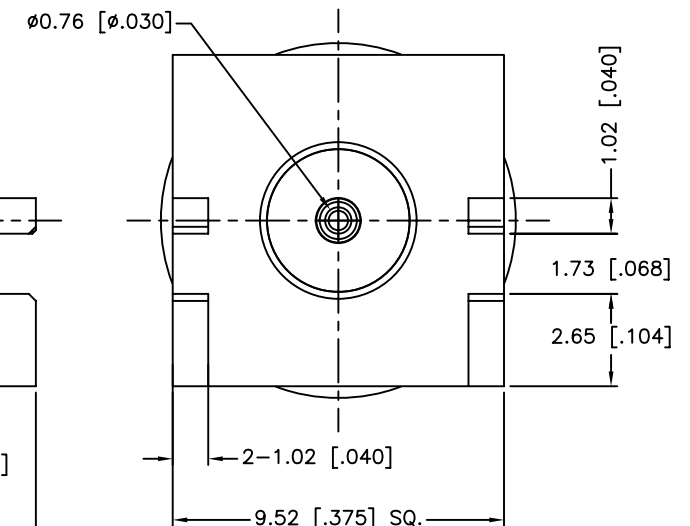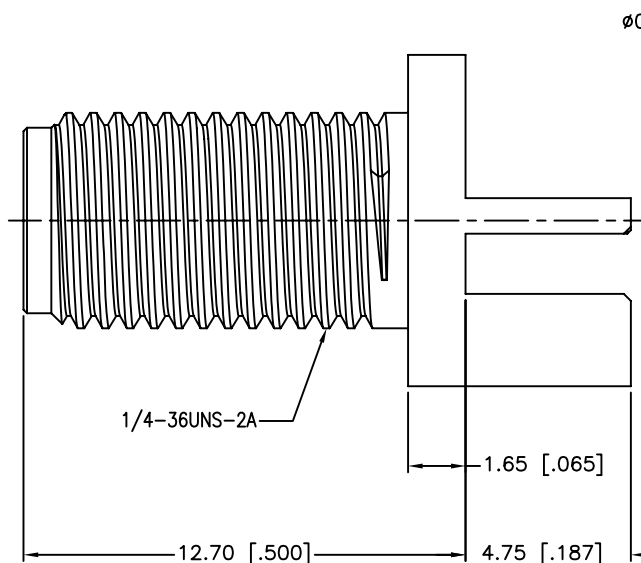

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE:
 0.5 - 8mm ± 0.20mm
 8 - 30mm ± 0.40mm
 30 - 120mm ± 0.50mm

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE:
 .020 - .315 = ± 0.007"
 .315 - 1.180 = ± 0.015"
 1.180 - 4.724 = ± 0.020"

DO NOT SCALE DRAWING

APPROVALS	DATE
DRAWN M.ZHANG	06/16/11
CHECKED	
ISSUED	
SHEET 1 OF 1	
CAD FILE C:/CONNEX/132289-14.DWG	

Amphenol Connex

PART DESCRIPTION

SMA END LAUNCH RECEPT. JACK
 WITH O-RING (FOR .062" BOARD THICKNESS)

PART NO.

132289-14

DWG. NO. 132289-14.DWG

REV. NC

SIZE A

SCALE NA

DESCRIPTION	MATERIAL	FINISH	QTY
6 HEX. NUT	BRASS	GOLD	1
5 LOCK WASHER	BRASS	GOLD	1
4 GASKET	SILICONE	RED	1
3 CONTACT PIN	BER. COPPER	GOLD	1
2 INSULATOR	PTFE	NATURAL	1
1 BODY	BRASS	GOLD	1