



NOTES:

- ELECTRICAL:
  - IMPEDANCE: 75 OHM
  - FREQUENCY RANGE: DC TO 3 GHz
  - VSWR(RETURN LOSS): 1.1, MAX.
  - DIELECTRIC WITHSTANDING VOLTAGE: 1500 VRMS, MIN.
- MECHANICAL:
  - DURABILITY: 500 CYCLES MIN.
  - TEMPERATURE RANGE: -65°C TO +165°C

| REV. | DATE     | ECR NO. | DESCRIPTION     |
|------|----------|---------|-----------------|
| NC   | 11/03/11 | XXXXXX  | INITIAL RELEASE |

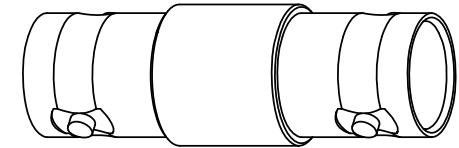

SCALE 1.000

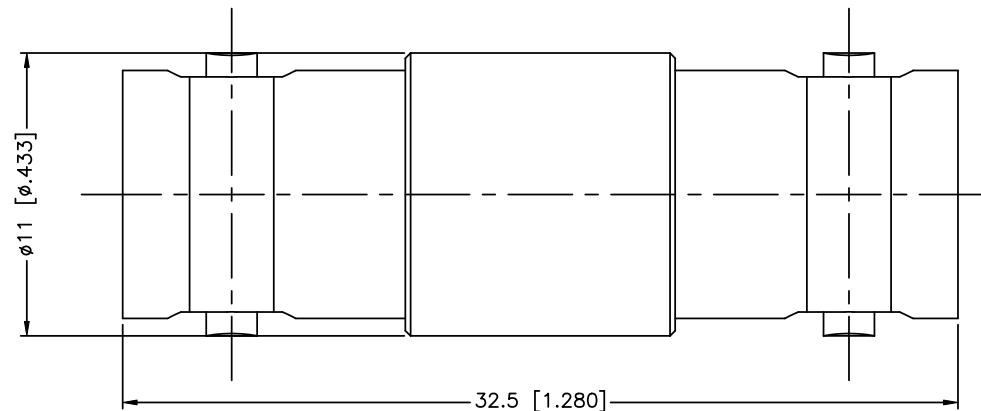

|   |             |                 |         |     |
|---|-------------|-----------------|---------|-----|
| 4 | LOCK RING   | BRASS           | NICKEL  | 1   |
| 3 | CONTACT PIN | PHOSPHOR BRONZE | GOLD    | 2   |
| 2 | INSULATOR   | PTFE            | NATURAL | 1   |
| 1 | BODY        | BRASS           | NICKEL  | 1   |
|   | DESCRIPTION | MATERIAL        | FINISH  | QTY |

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [ ] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE:  
0.5 - 8mm ± 0.20mm  
8 - 30mm ± 0.40mm  
30 - 120mm ± 0.50mm

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE:  
.020 - .315 = ± 0.007"  
.315 - 1.180 = ± 0.015"  
1.180 - 4.724 = ± 0.020"

DO NOT SCALE DRAWING

| APPROVALS    | DATE                 |
|--------------|----------------------|
| DRAWN T.DENG | 11/03/11             |
| CHECKED      |                      |
| ISSUED       |                      |
| SHEET 1 OF 1 |                      |
| CAD FILE     | C:/CONNEX/112992.DWG |

# Amphenol Connex

PART DESCRIPTION

BNC JACK TO JACK ADAPTOR

PART NO.

112992

DWG. NO.

112992.DWG

REV. NC

SIZE A

SCALE NA