


REV.	DATE	DESCRIPTION
D	04/11/97	ADD Ø15.75 BODY DIMENSION
E	01/19/98	CHANGE TO Ø15.57 BODY DIMENSION
F	03/19/05	UPDATE DRAWING FORMAT/ CHANGE STRIPPING DIMS
G	02/08/06	UPDATE ITEM ⑤ TO FLAT WASHER.
H	03/20/07	REVISE PLATING TO NEXCOTE

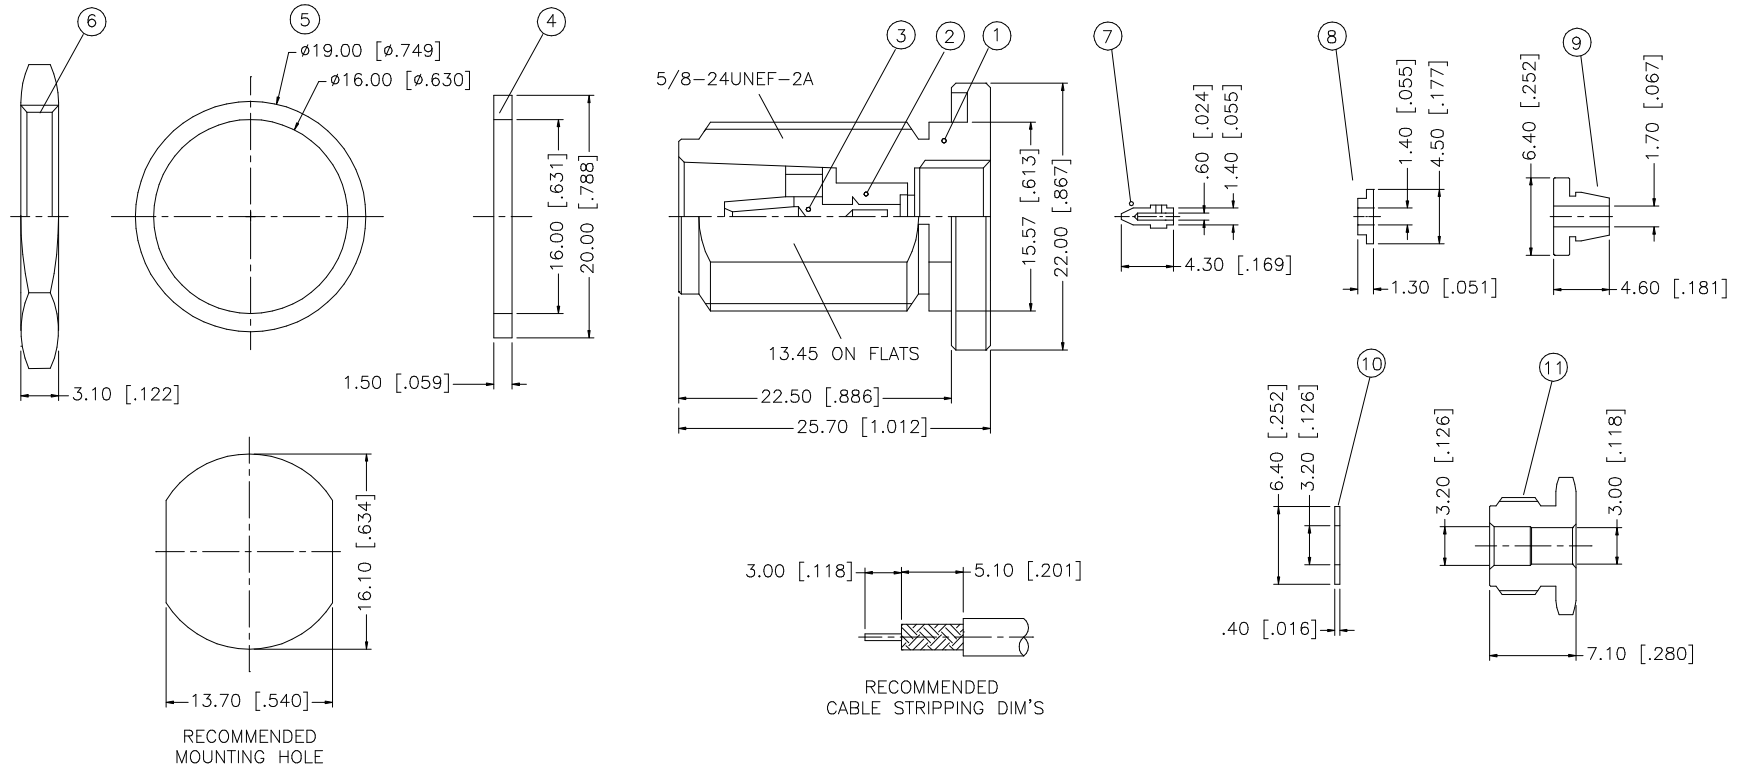

NOTE:

1. CONTACT PIN TO SOLDER
2. MAX. PANEL THICKNESS =6.5mm

12				
11	HEX NUT	BRASS	NEXCOTE	1
10	WASHER	BRASS	NEXCOTE	1
9	TOP HAT	BRASS	NEXCOTE	1
8	INSULATOR	TEFLON	NATURAL	1
7	CONTACT PIN	BRASS	GOLD	1
6	HEX NUT	BRASS	NEXCOTE	1
5	FLAT WASHER	BRASS	NEXCOTE	1
4	GASKET	SILICONE	RED	1
3	CONTACT PIN	BER. COPPER	GOLD	1
2	INSULATOR	TEFLON	NATURAL	1
1	BODY	BRASS	NEXCOTE	1
	DESCRIPTION	MATERIAL	FINISH	QTY

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE:
0.5 - 8mm ± 0.20mm
8 - 30mm ± 0.40mm
30 - 120mm ± 0.50mm

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE:
.020 - .315 = ± 0.007"
.315 - 1.180 = ± 0.015"
1.180 - 4.724 = ± 0.020"

DO NOT SCALE DRAWING

APPROVALS		DATE	Amphenol Connex			
DRAWN	G.R.S.	03/20/07				
CHECKED			PART DESCRIPTION			
ISSUED			N BULKHEAD CLAMP JACK (FOR RG-174/U,188A/U,316/U)			
SHEET	1 OF 1		PART NO.			
			172143			
CAD FILE			DWG. NO.	REV.	SIZE	SCALE
C:/172/172143.DWG			172143.DWG	H	A	NA