




REV.	DATE	DESCRIPTION
NC	04/31/03	INITIAL RELEASE
A	10/27/05	MODIFY – INSULATOR NOW INTERNAL

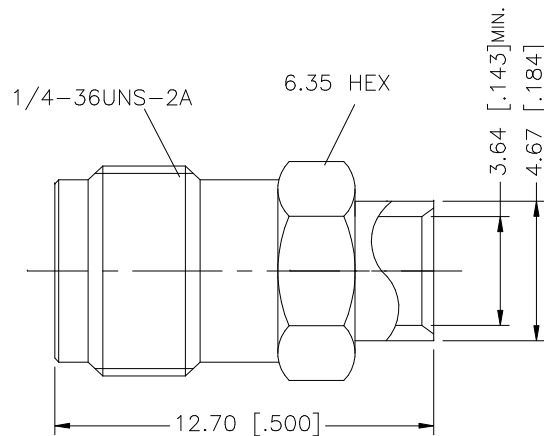

					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007" .315 – 1.180 = ± 0.015" 1.180 – 4.724 = ± 0.020" DO NOT SCALE DRAWING	APPROVALS		DATE		Amphenol Connex PART DESCRIPTION SMA DIRECT SOLDER JACK (FOR .141” SEMI–RIGID CABLE) PART NO. 132104 DWG. NO.132104.DWG REV.A SIZEA SCALENA				
8						DRAWN	G.R.S.	10/27/05						
7						CHECKED								
6						ISSUED								
5						SHEET	1 OF 1							
4														
3	CONTACT PIN	BER. COPPER	GOLD	1										
2	INSULATOR	TEFLON	NATURAL	1										
1	BODY	BRASS	GOLD	1										
	DESCRIPTION	MATERIAL	FINISH	QTY				CAD FILE C:/132/132104.DWG		DWG. NO.132104.DWG		REV.A	SIZEA	SCALENA