ROHS COMPLIANT

REVISION HISTORY			
REV	DESCRIPTION	DATE	APPROVED
-	NRN 45230	09/20	BNK

PRODUCT DATA DRAWING

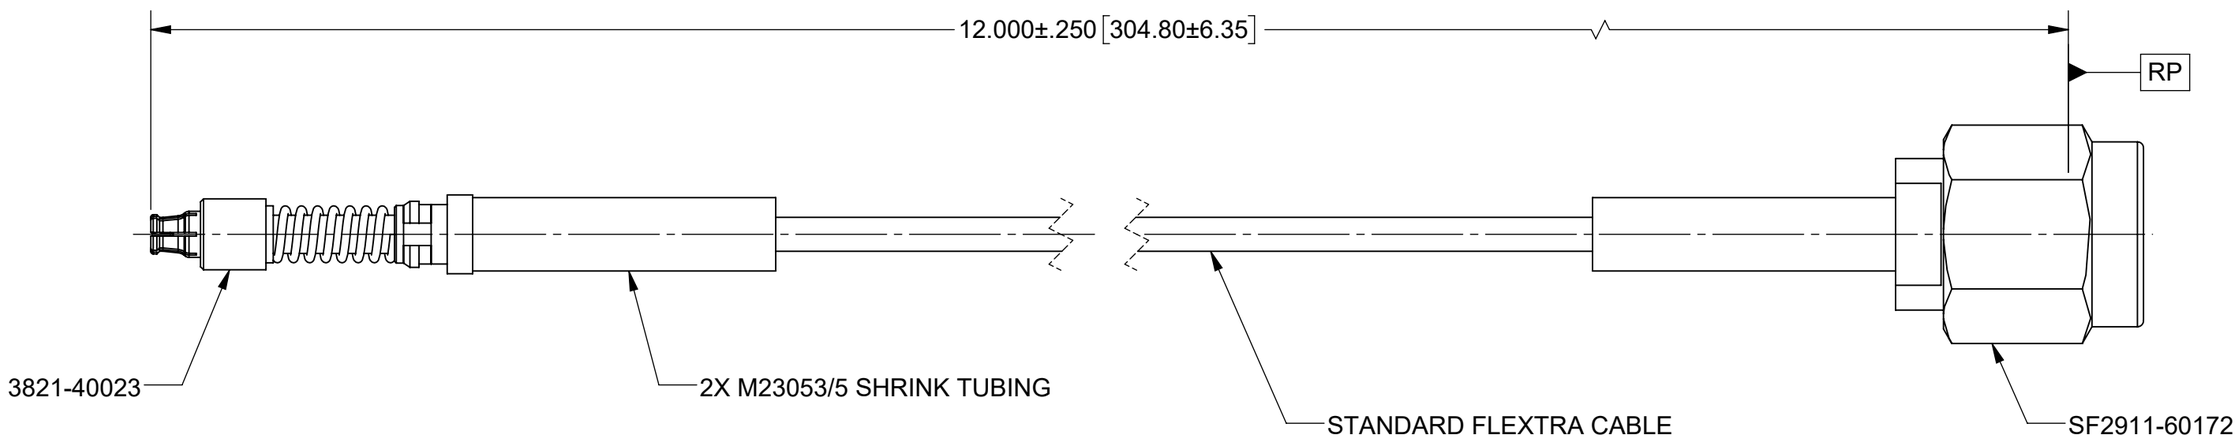

COMPONENTS:

CONNECTORS: SMPS COMPRESSIBLE FEMALE (3821-40023)
SMA MALE PLUG (SF2911-60172)

CABLE: STANDARD FLEXTRA CABLE

SHRINK TUBING: M23053/5

PERFORMANCE:

IMPEDANCE: 50 OHMS
FREQ. RANGE: DC TO 18.0 GHz

MATERIAL: SEE NOTES

FINISH: SEE NOTES

SURFACE AREA: N/A

PROPRIETARY

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SV MICROWAVE, INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF SV MICROWAVE, INC IS PROHIBITED.

DIMENSIONS ARE IN INCHES TOLERANCES:

FRACTIONAL: ±1/64 ANGULAR: X° ±1°0'
X°X' ±15'

DECIMAL: .X ±.030
.XX ±.010
.XXX ±.005

INTERPRET DIMENSIONS AND TOLERANCES PER ASME Y14.5M - 1994

THIRD ANGLE PROJECTION

UNLESS OTHERWISE SPECIFIED

1) ALL DIMENSIONS ARE IN INCHES [MILLIMETERS]
2) ALL DIMENSIONS ARE AFTER PLATING.
3) BREAK CORNERS & EDGES .005 R. MAX.
4) CHAM. 1ST & LAST THREADS.
5) SURFACE ROUGHNESS 63 MIL-STD-10.
6) DIA. S ON COMMON CENTERS TO BE CONCENTRIC WITHIN .005 T.I.R.
7) REMOVE ALL BURRS

DRAWN:	JDT 09/30/20	
CHECKED:	BNK 09/30/20	
APPROVED:	BNK 09/30/20	

Amphenol SV MICROWAVE
www.svmicrowave.com

TITLE: SMPS FEMALE VITA 67.3 TO SMA MALE STANDARD FLEXTRA CABLE ASSEMBLY

SIZE B | DWG. NO. 7038-0371

SCALE: 4:1 | SHEET 1 OF 1

Downloaded from Arrow.com.