

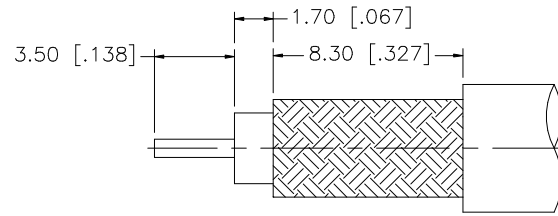
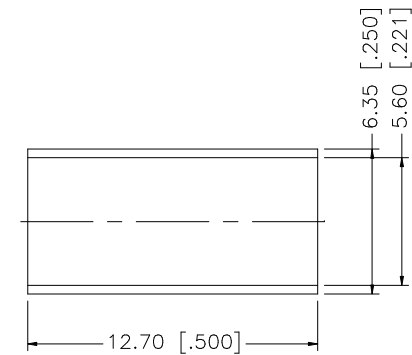


REV.	DATE	DESCRIPTION
A	04/31/03	UPDATE DRAWING FORMAT



RECOMMENDED CABLE
STRIPPING DIMENSIONS

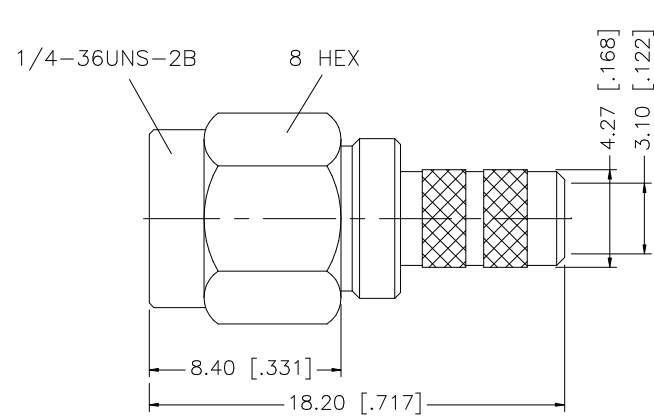

CRIMP NOTES:

1. CRIMPED FERRULE
HEX CRIMP SIZE .213"
2. SOLDER CENTER CONTACT

					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007” .315 – 1.180 = ± 0.015” 1.180 – 4.724 = ± 0.020” DO NOT SCALE DRAWING	APPROVALS	DATE	Amphenol Connex									
8						DRAWN	G.R.S.							04/31/03			
7						CHECKED											
6	FERRULE	COPPER	GOLD	1			ISSUED		PART DESCRIPTION								
5	GASKET	SILICONE	RED	1			SHEET	1 OF 1	SMA CRIMP PLUG (FOR RG–55/U, 142A/U, 223/U, 400/U)								
4	RETAINER RING	BER. COPPER	NATURAL	1					PART NO.								
3	CONTACT PIN	BRASS	GOLD	1			CAD FILE		132195								
2	INSULATOR	TEFLON	NATURAL	1													
1	BODY	BRASS	GOLD	1													
	DESCRIPTION	MATERIAL	FINISH	QTY		C:/132/132195.DWG		DWG. NO.		132195.DWG		REV.	A	SIZE	A	SCALE	NA