


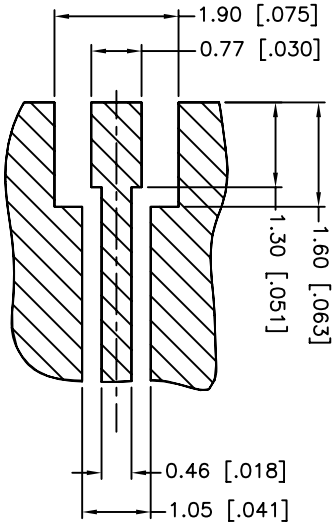


REV.	DATE	ECR NO.	DESCRIPTION
NC	04/02/11	XXXXXX	INITIAL RELEASE

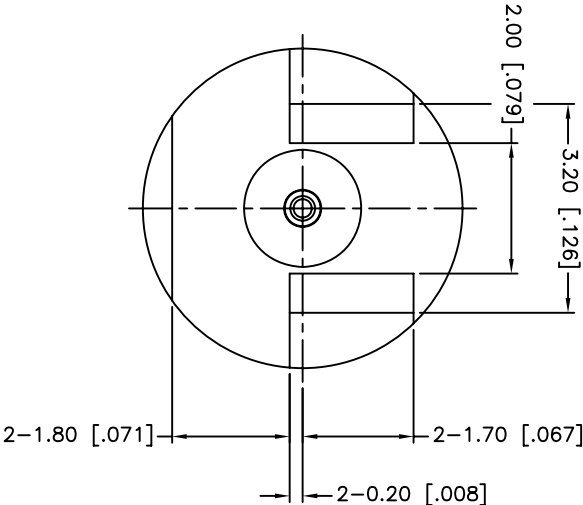

RECOMMENDED PCB LAYOUT

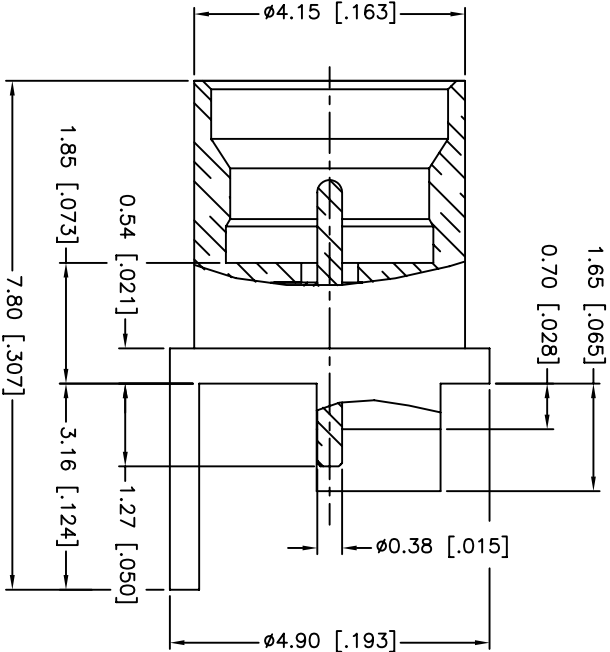

- FREQUENCY RANGE: DC 0-26.5 GHz
- PCB THICKNESS=1.6 mm

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS (DIMENSIONS IN INCHES ARE FOR CUSTOMER REFERENCE ONLY).			APPROVALS		DATE	Amphenol Connex SMP END LAUNCH RECEPT. JACK, LIMITED DETENT (FOR 1.6MM THICK PCB) PART NO. 302114
3	CONTACT PIN	BRASS	GOLD	1		
2	INSULATOR	PTFE	NATURAL	1		
1	BODY	BERYLLIUM COPPER	GOLD	1		
	DESCRIPTION	MATERIAL	FINISH	QTY		
UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS (DIMENSIONS IN INCHES ARE FOR CUSTOMER REFERENCE ONLY).			DO NOT SCALE DRAWING		CAD FILE C:/CONNEX/302114.DWG	DWG. NO. 302114.DWG
UNLESS OTHERWISE SPECIFIED, TOLERANCES FOR MILLIMETERS ARE: 0.5 - 8mm ± 0.20mm 8 - 30mm ± 0.40mm 30 - 120mm ± 0.50mm			DRAWN M.ZHANG		04/02/11	PART DESCRIPTION
UNLESS OTHERWISE SPECIFIED, TOLERANCES FOR INCHES ARE: .020 - .315 = ± 0.007" .315 - 1.180 = ± 0.015" 1.180 - 4.724 = ± 0.020"			CHECKED			
			ISSUED			
			SHEET 1 OF 1			
			REV. NC		SIZE A	
					SCALE NA	