

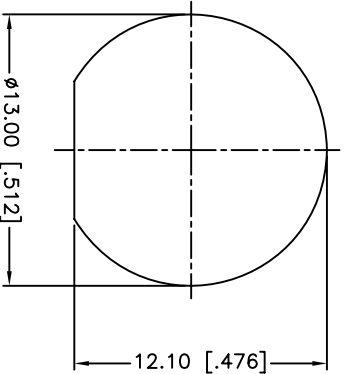
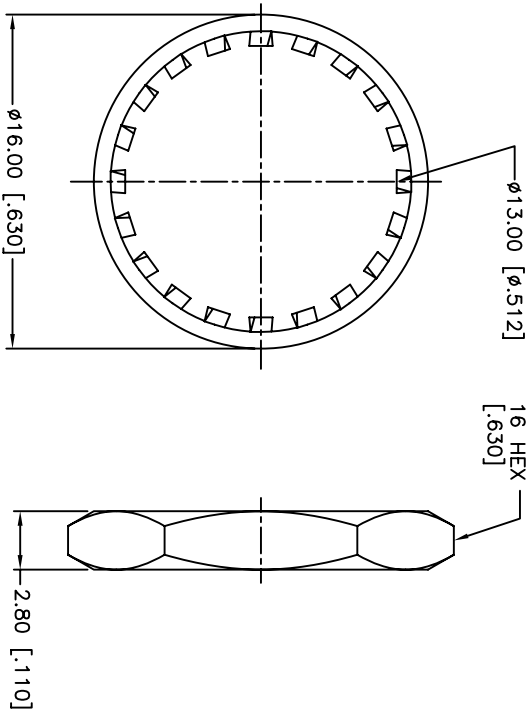


REV.	DATE	ECR NO.	DESCRIPTION
NC	07/30/08	XXXXXX	INITIAL RELEASE
A	10/29/13	2545	UPDATE FORMAT, ADD ELECTRICAL/MECHANICAL NOTES

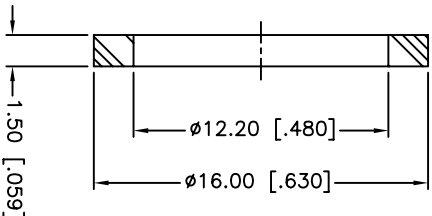

RECOMMENDED
MOUNTING HOLE

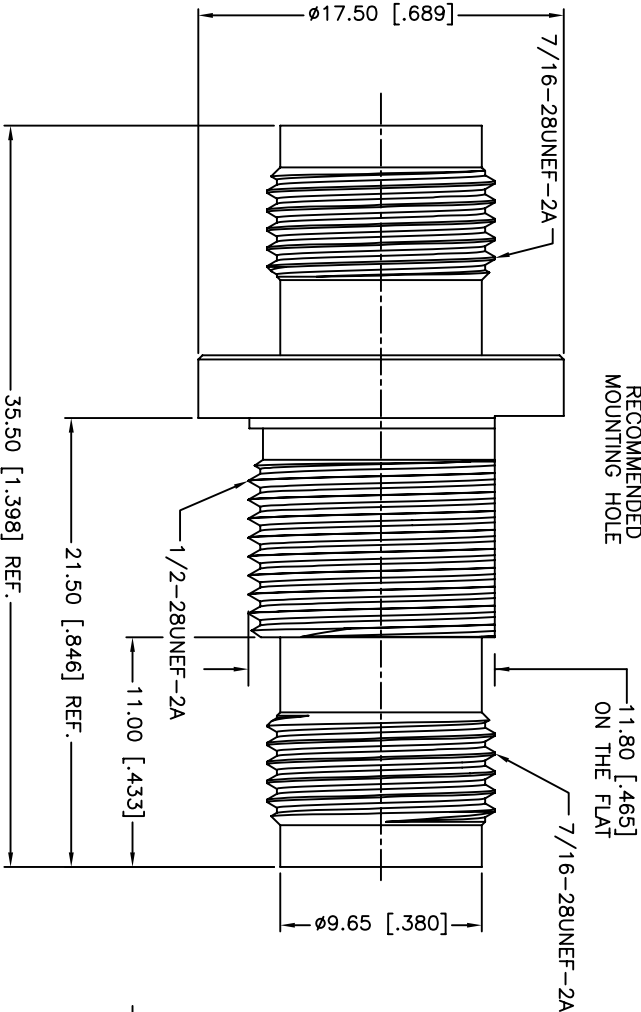

1. IMPEDANCE: 75 OHM
2. FREQUENCY RANGE: 0-2 GHZ
3. VSWR: 1.3 MAX.
4. DIELECTRIC WITHSTANDING VOLTAGE: 1500 VRMS, MIN.
5. DURABILITY: 100 CYCLES MIN.
6. TEMPERATURE RANGE: -40°C TO +85°C
7. MAX. PANEL THICKNESS=6.5 mm

7	HEX NUT	BRASS	NICKEL	1
6	LOCK WASHER	BRASS	NICKEL	1
5	GASKET	SILICONE RUBBER	RED	1
4	CONTACT PIN	PHOSPHOR BRONZE	GOLD	1
3	INSULATOR	DELRIIN	NATURAL	1
2	BODY	BRASS	NICKEL	1
1	HOUSING	BRASS	NICKEL	1
	DESCRIPTION	MATERIAL	FINISH	QTY

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS (DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. TOLERANCES FOR MILLIMETERS ARE:

<0.5 ± 0.05mm

0.5 - 6mm ± 0.10mm

6 - 30mm ± 0.20mm

30 - 120mm ± 0.30mm

ANGLES ± 1°

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE:

<.020 ± 0.002"

.020 - .236 ± 0.004"

.236 - 1.180 ± 0.007"

1.180 - 4.724 ± 0.012"

ANGLES ± 1°

APPROVALS	DATE	PART DESCRIPTION
DRAWN M.ZHANG	10/29/13	Amphenol Connex TNC FEMALE TO FEMALE BULKHEAD ADAPTOR
CHECKED		
ISSUED		
SHEET 1 OF 1		
CAD FILE		PART NO. 122341
C:/CONNEX/122341.DWG		DWG. NO. 122341.DWG
REV. A	SIZE A	SCALE NA