

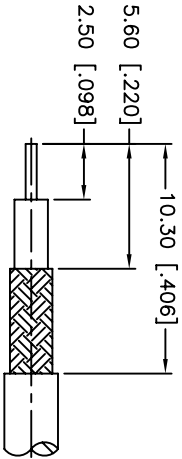



REV.	DATE	ECR NO.	DESCRIPTION
NC	12/01/95	XXXXXX	INITIAL RELEASE
A	01/31/06	XXXXXX	UPDATE DRAWING FORMAT
B	05/23/12	2285	CHANGE NOTE 2 AND ADD NOTES



RECOMMENDED
CABLE STRIPPING DIM'S

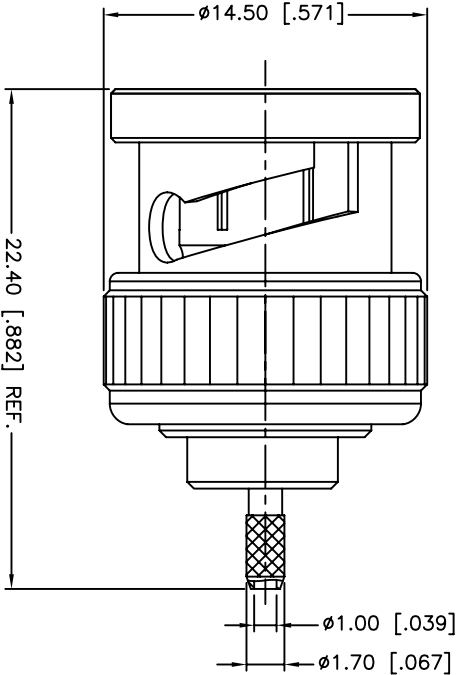

1. IMPEDANCE: 50 OHM
2. FREQUENCY RANGE: DC – 4 GHz
3. VSWR: 1.3 MAX.
4. DIELECTRIC WITHSTANDING VOLTAGE: 1500 VRMS, MIN.
5. DURABILITY: 500 CYCLES MIN.
6. TEMPERATURE RANGE: –40° TO +85°C
7. CRIMPED FERRULE
HEX. CRIMP SIZE .128"
8. CONTACT PIN CAN BE SOLDERED,
OR USE 4-WAY INDENT CRIMP TOOL #47025

10	FERRULE	COPPER	NICKEL	1	UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN () ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED, TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED, TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007" .315 – 1.180 = ± 0.015" 1.180 – 4.724 = ± 0.020"	DO NOT SCALE DRAWING													
9	CONTACT PIN	BRASS	GOLD	1		APPROVALS	DATE												
8	WASHER	BRASS	NICKEL	1															
7	SPRING	SK5	NICKEL	1		DRAWN	M.ZHANG												
6	RETAINER RING	BRASS	NICKEL	1		CHECKED													
5	GASKET	RUBBER	RED	1		ISSUED													
4	CONTACT PIN	PHOSPHOR BRONZE	GOLD	1		SHEET	1 OF 1												
3	INSULATOR	DELFIN	NATURAL	1		CAD FILE													
2	BODY	BRASS	NICKEL	1		C:/CONNEX/112516.DWG													
1	SHELL	BRASS	NICKEL	1		DWG. NO. 112516.DWG													
DESCRIPTION					MATERIAL		FINISH		QTY										
Amphenol Connex BNC CRIMP PLUG (FOR RG-178B/U, 196A/U CABLE)										PART DESCRIPTION		DWG. NO. 112516		REV. B		SIZE A		SCALE NA	

Amphenol Connex