



REV.	DATE	ECR NO.	DESCRIPTION
NC	01/04/11	XXXXXX	INITIAL RELEASE

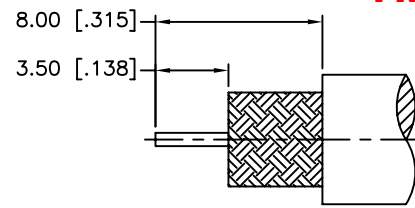

RECOMMENDED
CABLE STRIPPING DIM'S

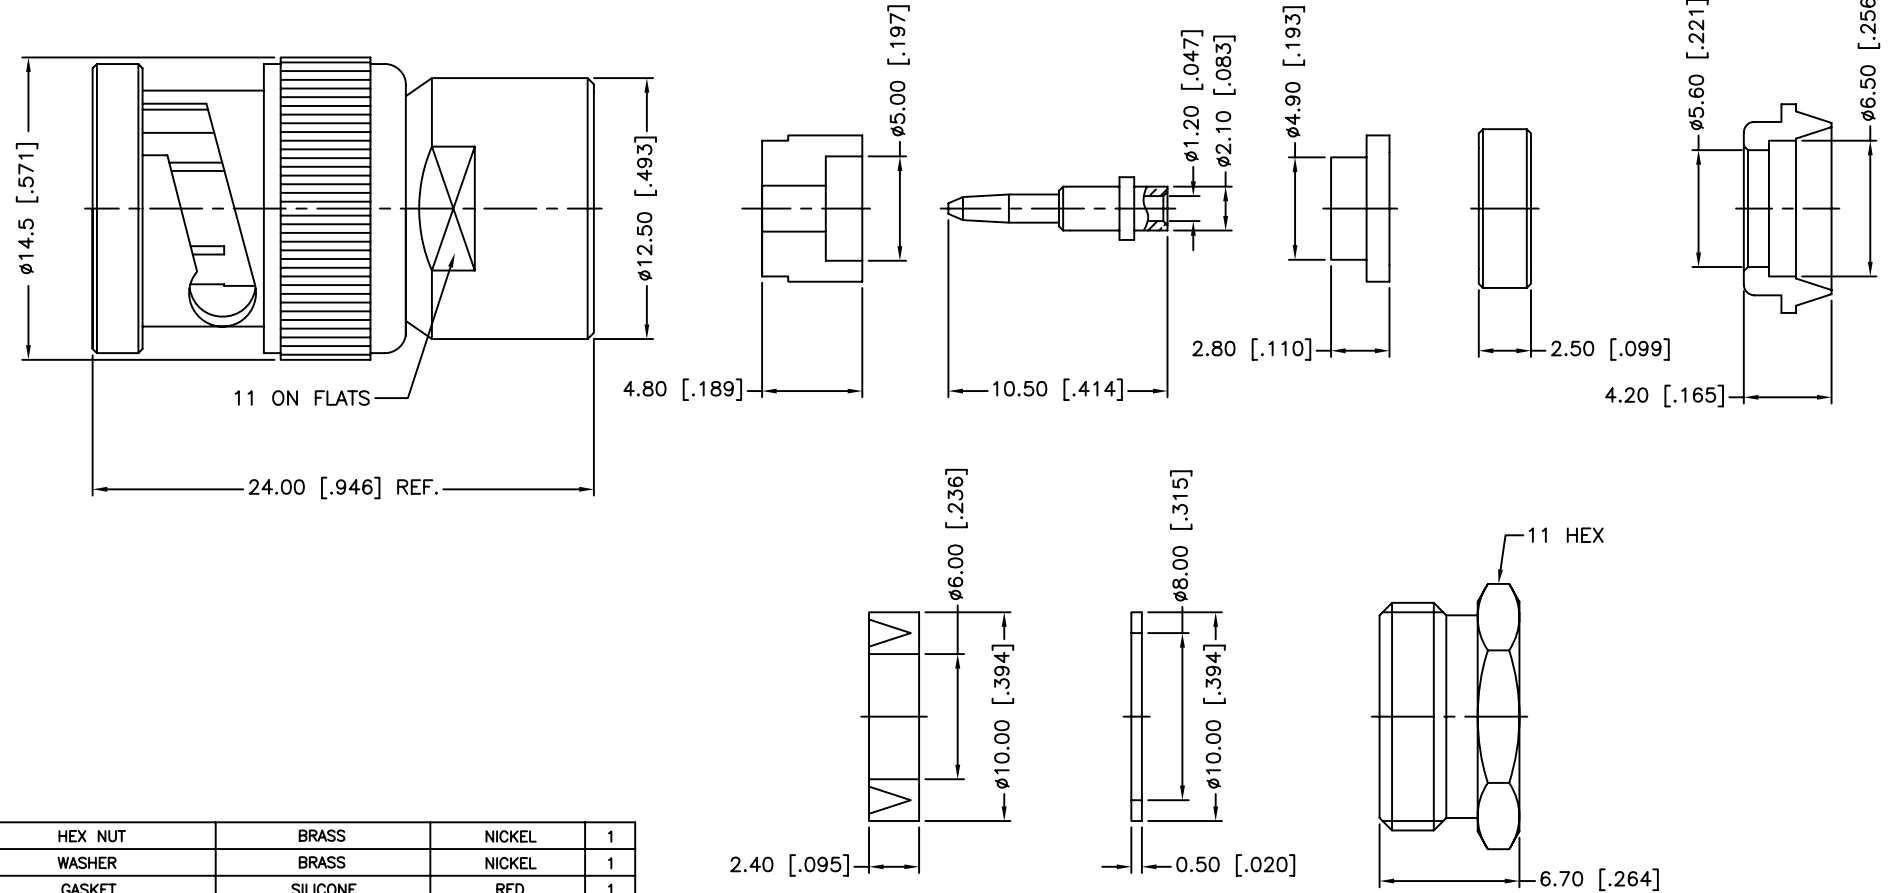

1 .CONTACT PIN TO SOLDER

14	HEX NUT	BRASS	NICKEL	1
13	WASHER	BRASS	NICKEL	1
12	GASKET	SILICONE	RED	1
11	BRAID CLAMP	BRASS	NICKEL	1
10	RING	BRASS	NICKEL	1
9	INSULATOR	DELRIN	NATURAL	1
8	CONTACT PIN	BRASS	GOLD	1
7	INSULATOR	DELRIN	NATURAL	1
6	WASHER	BRASS	NICKEL	1
5	SPRING	SK5	NICKEL	1
4	RETAINER RING	BRASS	NICKEL	1
3	GASKET	RUBBER	RED	1
2	BODY	BRASS	NICKEL	1
1	SHELL	BRASS	NICKEL	1
	DESCRIPTION	MATERIAL	FINISH	QTY

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE:
0.5 - 8mm $\pm$ 0.20mm
8 - 30mm $\pm$ 0.40mm
30 - 120mm $\pm$ 0.50mm

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE:
.020 - .315 = $\pm$ 0.007"
.315 - 1.180 = $\pm$ 0.015"
1.180 - 4.724 = $\pm$ 0.020"

DO NOT SCALE DRAWING

APPROVALS	DATE
DRAWN M.ZHANG	01/04/11
CHECKED	
ISSUED	
SHEET 1 OF 1	
CAD FILE	C:/CONNEX/112335.DWG

Amphenol Connex

PART DESCRIPTION

**BNC CLAMP PLUG
(FOR RG-59/U CABLE)**

PART NO.

112335

DWG. NO. 112335.DWG

REV. NC

SIZE A

SCALE NA