
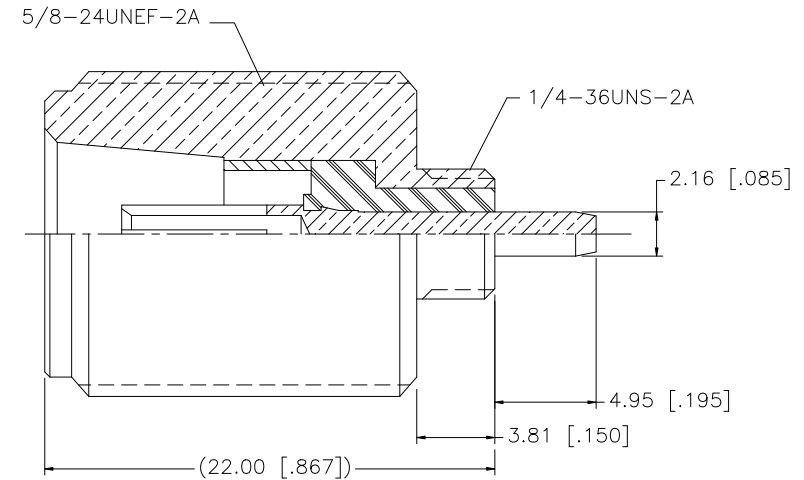
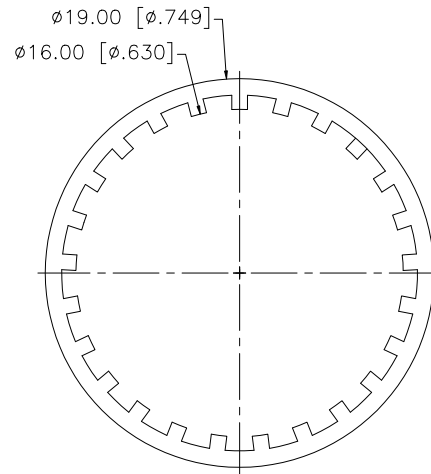


REV.	DATE	DESCRIPTION
NC	09/09/07	INITIAL RELEASE

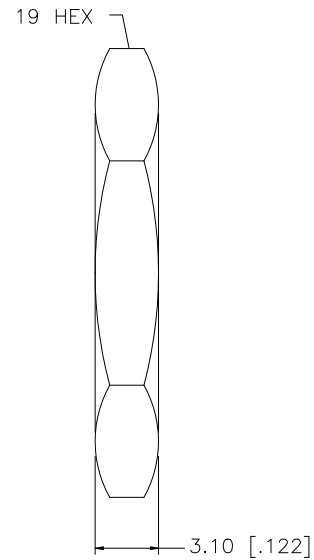

NOTES:

1. MAX. PANEL THICKNESS = 2.6mm

					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007” .315 – 1.180 = ± 0.015” 1.180 – 4.724 = ± 0.020” DO NOT SCALE DRAWING	APPROVALS	DATE	Amphenol Connex										
8						DRAWN	G.R.S.							09/09/07				
7						CHECKED												
6						ISSUED			PART DESCRIPTION									
5	HEX NUT	BRASS	NICKEL	1			SHEET	1 OF 1		N JACK TO MCX JACK S/S BODY								
4	LOCK WASHER	BRASS	NICKEL	1						PART NO.								
3	INSULATOR	TEFLON	NATURAL	1						242191–10SS								
2	CONTACT PIN	BER. COPPER	GOLD	1						DWG. NO.								
1	HOUSING/BODY	STAINLESS STEEL	NICKEL	1						242191–10SS.DWG								
	DESCRIPTION	MATERIAL	FINISH	QTY			CAD FILE C:/242/242191–10SS.DWG			DWG. NO.		242191–10SS.DWG		REV.	NC	SIZE	A	SCALE