

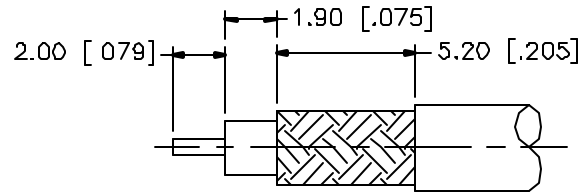
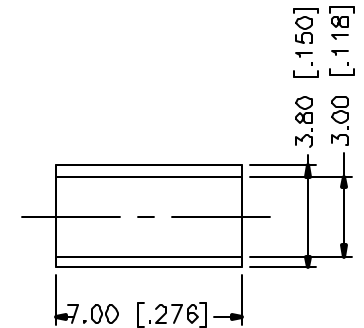


REV.	DATE	DESCRIPTION
NC	12/28/00	INITIAL RELEASE

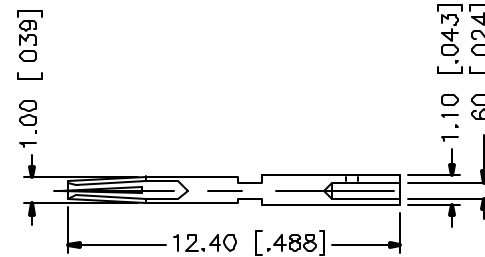

RECOMMENDED CABLE
STRIPPING DIM'S

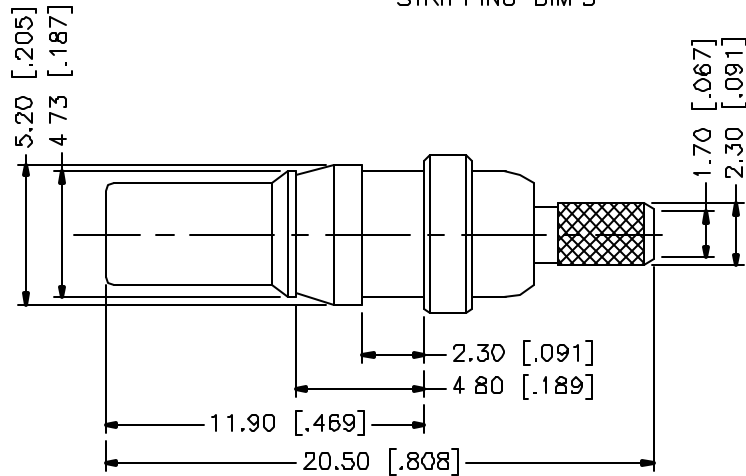

8				UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS DIMENSIONS IN [] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY	APPROVALS DRAWN G.R.S. CHECKED ISSUED	DATE 12/28/00				
7										
6										
5	FERRULE	COPPER	NICKEL							
4	CONTACT PIN	BER. COPPER	GOLD	UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5-6 = ± 0.2 6-30 = ± 0.4 30-120 = ± 0.6 120-315 = ± 1 315-1000 = ± 1.6 1000-2000 = ± 2.4			TITLE 1.0/2.3 CRIMP JACK (FOR 316/U CABLE)			
3	BARREL	BRASS	NICKEL							
2	INSULATOR	TEFLON	NATURAL							
1	BODY	BRASS	GOLD							
	DESCRIPTION	MATERIAL	FINISH	DO NOT SCALE DRAWING			SIZE A	FSCM NO. 99001	DWG. NO. 282104.DWG	REV. NC
							SCALE NA	PART NO. 282104	SHEET 1 OF 1	