


REV.	DATE	DESCRIPTION
A	05/15/05	UPDATE DRAWING FORMAT / ADD FLAT

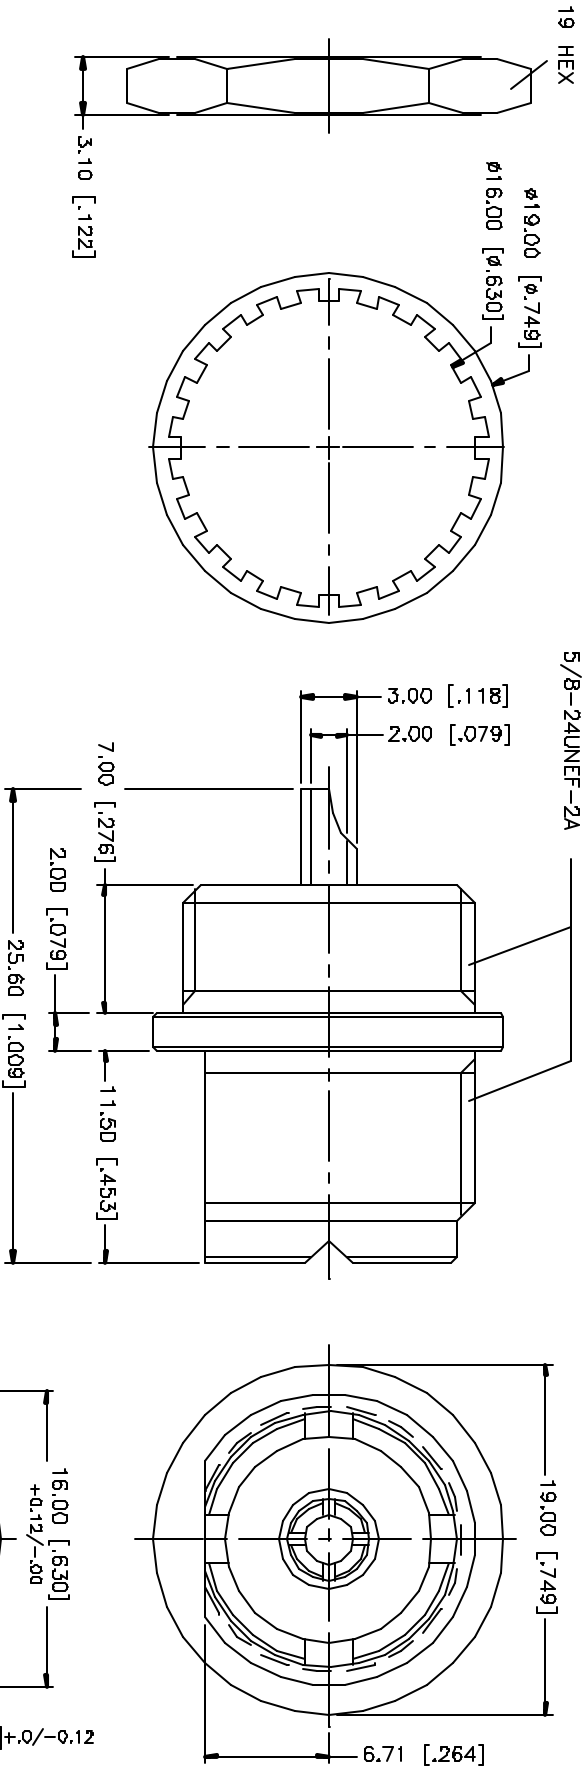

NOTE:
1. PIN TO WITHSTAND 4 INCH-OUNCE RADIAL FORCE.

RECOMMENDED
MOUNTING HOLE

						UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN INCHES ARE FOR INFORMATION PURPOSES ONLY.				APPROVALS		DATE	Amphenol Connex UHF BULKHEAD RECEPTACLE REAR MOUNT 1823320			
8						UNLESS OTHERWISE SPECIFIED TOLERANCES PER MIL-STD-883C				DRAWN	G.R.S.	05/15/05				
7						0.5 - 8mm ± 0.20mm 8 - 30mm ± 0.40mm 30 - 120mm ± 0.50mm				CHECKED						
6						UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS				INSPEL						
5	HEX NUT	BRASS	NICKEL	1		.020 - .315 = ± 0.007" .315 - 1.180 = ± 0.015" 1.180 - 4.724 = ± 0.020"				SHEET	1 OF 1					
4	LOCK WASHER	BRASS	NICKEL	1		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS				PART NO.						
3	CONTACT PIN	BRASS	NICKEL	1		.020 - .315 = ± 0.007" .315 - 1.180 = ± 0.015" 1.180 - 4.724 = ± 0.020"				PART NO.						
2	INSULATOR	TEFLON	NATURAL	1		.020 - .315 = ± 0.007" .315 - 1.180 = ± 0.015" 1.180 - 4.724 = ± 0.020"				PART NO.						
1	BODY	BRASS	NICKEL	1		.020 - .315 = ± 0.007" .315 - 1.180 = ± 0.015" 1.180 - 4.724 = ± 0.020"				PART NO.						
	DESCRIPTION	MATERIAL	FINISH	QTY	DO NOT SCALE DRAWING		QAD FILE		C:/182/1823320.DWG		DWG. NO.		1823320.DWG	REV. A	SIZE A	SCALE NA