

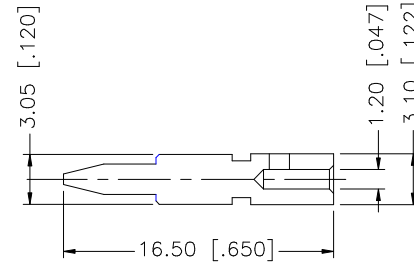
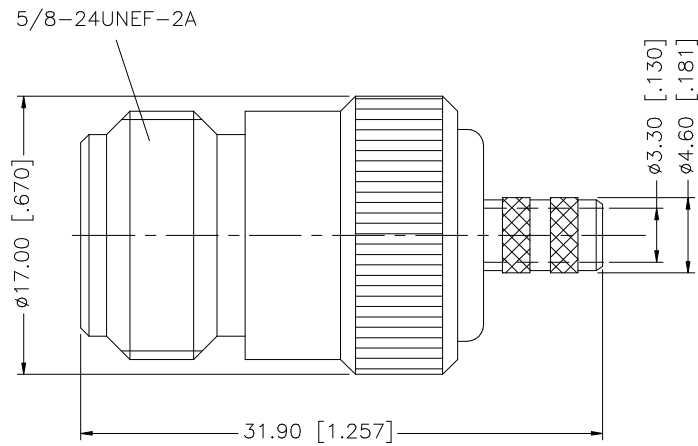


REV.	DATE	DESCRIPTION
NC	07/13/99	INITIAL RELEASE
A	07/31/05	UPDATE DRAWING FORMAT
B	01/03/07	REVISE FERRULE CRIMP NOTE TO .213" HEX

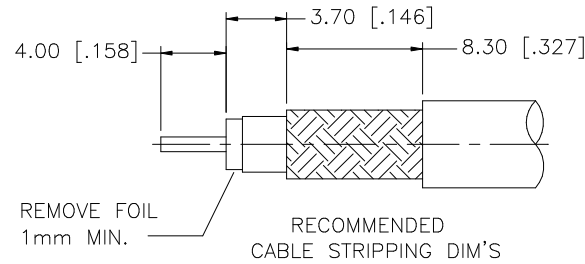

NOTE:

1. CRIMPED FERRULE HEX CRIMP SIZE .213"
2. CRIMPED CONTACT PIN HEX CRIMP SIZE .100" OR SOLDER.

					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.	APPROVALS		DATE		Amphenol Connex						
8						UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm	DRAWN	G.R.S.	01/03/07							
7					UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007” .315 – 1.180 = ± 0.015” 1.180 – 4.724 = ± 0.020”	CHECKED			PART DESCRIPTION							
6						ISSUED			N CRIMP JACK – REVERSE POLARIZED (FOR LMR 200 CABLE)							
5					UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007” .315 – 1.180 = ± 0.015” 1.180 – 4.724 = ± 0.020”	SHEET	1 OF 1		PART NO.							
4	FERRULE	COPPER	NEXCOTE	1		CAD FILE	C:/172/172216RP.DWG			172216RP						
3	CONTACT PIN	BRASS	GOLD	1	DO NOT SCALE DRAWING	DWG. NO.			172216RP.DWG		REV.	B	SIZE	A	SCALE	NA
2	INSULATOR	TEFLON	NATURAL	1												
1	BODY	BRASS	NEXCOTE	1												
	DESCRIPTION	MATERIAL	FINISH	QTY												