

Technical drawing of the cable assembly showing side and cross-sectional views with dimensions.


Side View Dimensions:

- Overall length: 14.50 [.571]
- FLARE TO: 8.30 [.327] ± 0.07
- Overall height: 25.00 [.985]
- Bottom flange width: 4.27 [.168]
- Bottom flange thickness: 3.10 [.122]

Cross-sectional View Dimensions:

- Top flange thickness: 4.00 [.158]
- Stripping length: 3.80 [.150]
- Bottom flange width: 8.30 [.327]

RECOMMENDED CABLE STRIPPING DIM'S

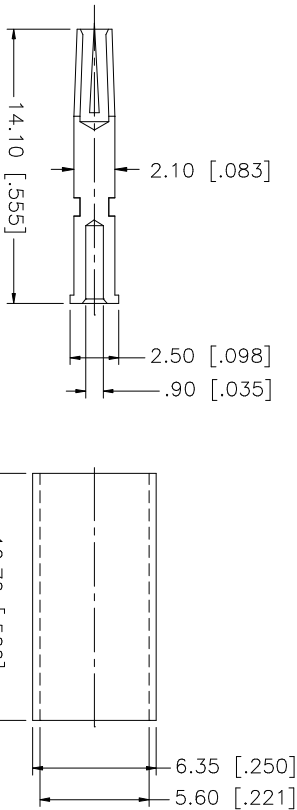

1. CRIMPED FERRULE
HEX CRIMP SIZE .213"
2. CRIMPED CONTACT PIN
HEX CRIMP SIZE .068"

Amphenol Connex