

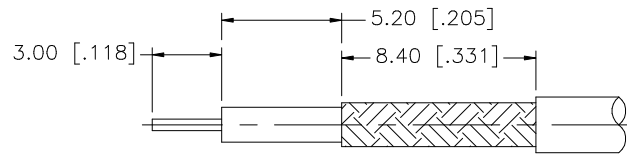
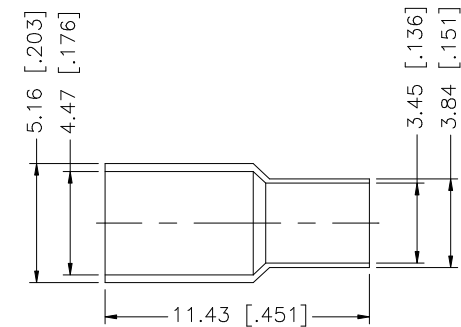
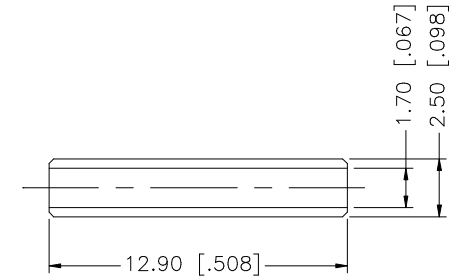


REV.	DATE	DESCRIPTION
NC	11/08/99	INITIAL RELEASE
A	10/01/06	UPDATE DRAWING FORMAT

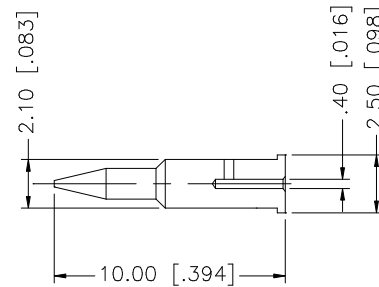

RECOMMENDED
CABLE STRIPPING DIM'S

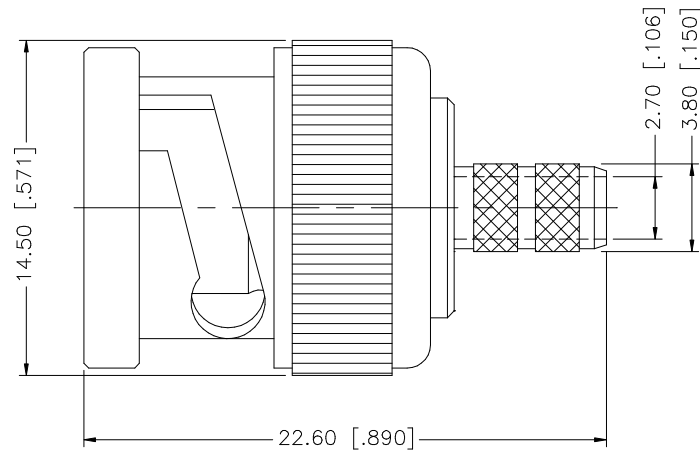

					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007" .315 – 1.180 = ± 0.015" 1.180 – 4.724 = ± 0.020" DO NOT SCALE DRAWING	APPROVALS	DATE	Amphenol Connex				
8						DRAWN	G.R.S.					10/01/06
7						CHECKED						
6						ISSUED			PART DESCRIPTION BNC CRIMP PLUG (FOR RG-179/U DOUBLE BRAID CABLE)			
5						SHEET	1 OF 1					
4	FERRULE	COPPER	NICKEL	1		PART NO.			112644			
3	CONTACT PIN	BER. COPPER	GOLD	1		CAD FILE	C:/112/112644.DWG	DWG. NO.	112644.DWG	REV. A	SIZE A	SCALE NA
2	INSULATOR	DELTRIN	NATURAL	1								
1	BODY	BRASS	NICKEL	1								
	DESCRIPTION	MATERIAL	FINISH	QTY								