
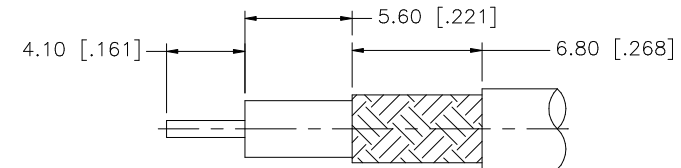
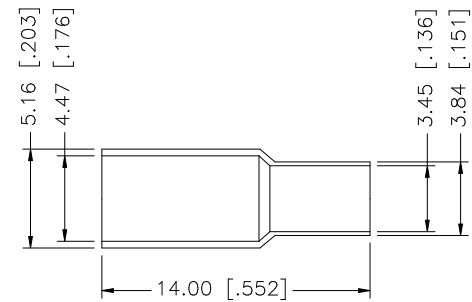


REV.	DATE	DESCRIPTION
NC	01/30/07	INITIAL RELEASE

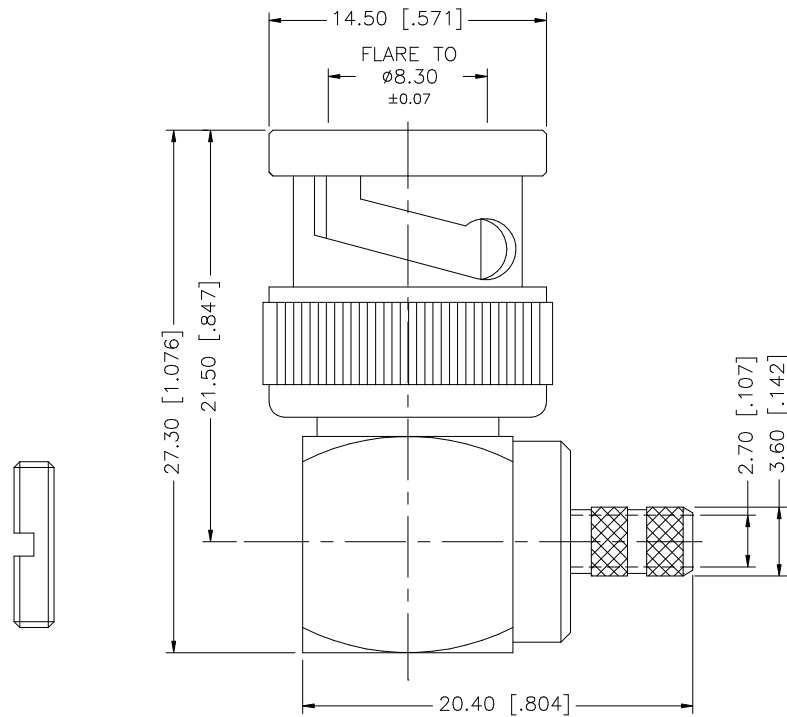

RECOMMENDED
CABLE STRIPPING DIM'S

NOTE:

1. CRIMPED FERRULE HEX CRIMP SIZE .178"
2. CONTACT PIN TO SOLDER

					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS; DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 - 8mm ± 0.20mm 8 - 30mm ± 0.40mm 30 - 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 - .315 = ± 0.007" .315 - 1.180 = ± 0.015" 1.180 - 4.724 = ± 0.020"	APPROVALS		DATE		Amphenol Connex				
8						DRAWN	G.R.S.	01/30/07						
7						CHECKED								
6						ISSUED				PART DESCRIPTION BNC R/A CRIMP PLUG (316/U DOUBLE BRAID CABLE)				
5						SHEET	1 OF 1							
4	FERRULE	COPPER	NICKEL	1						PART NO. 112528				
3	CONTACT PIN	PHOS. BRONZE	GOLD	1										
2	INSULATOR	DELIN	NATURAL	1						DWG. NO. 112528.DWG REV. NC SIZE A SCALE NA				
1	BODY	BRASS	NICKEL	1										
	DESCRIPTION	MATERIAL	FINISH	QTY	DO NOT SCALE DRAWING	CAD FILE C:/112/112528.DWG								