



Search

TJM222709

Find

TJM222709

Find

Locate Inventory

Find

Part Number Search


Displaying 1 - 1 of 1

TJM222709


Series:	Series 1
Type:	Feedthru
Number of Contacts:	10
Number of Contacts per Size:	10
Contact Size:	16, 20
Contact Type:	Pin
Contact Part Number:	M39029/1-100
QPL:	M81714/6-DJ1
Mil-Spec:	Active Mil-Spec
Temperature (Degrees C):	-65 to 200
Insulation Resistance:	5000 Megahms at 25 degrees Celcius
Dielectric Withstanding Voltage:	1500 VRMS at Sea Level 200 VRMS at 100,000 Ft.
Amperage:	5 Amps
Vibration and Shock:	MIL-T-81714 Paragraph 3.5.5 and 3.5.8
Body:	Polyetherimide per ASTM-D5205
Grommet:	Silicone Blend Elastomer per A-A-59588
Contact Retainers:	Stainless Steel
Socket/Pin Contacts:	Copper Alloy, Hard Gold Plated in Accordance with MIL-G-45204
With/Without:	With
Color:	Blue
Electronic Component Type:	N/A
Electronic Component Part No.:	N/A
Electronic Req. Qty:	N/A

Dimension Image:

Feedback Dimensions

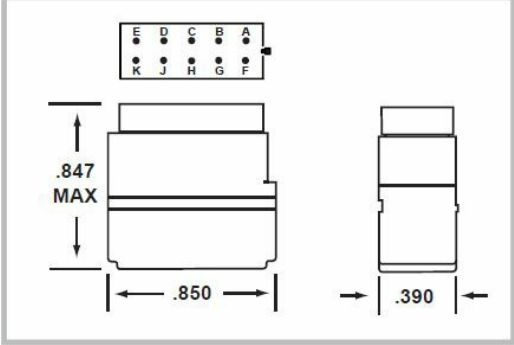

Feedthru Dimensions

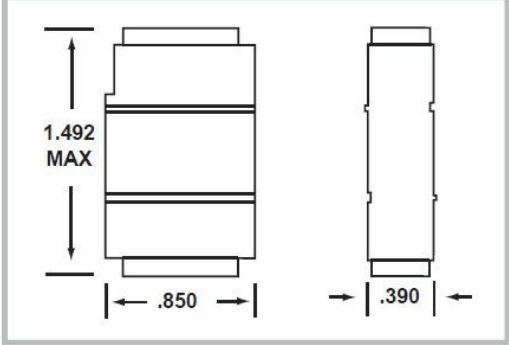

Bussing or Circuit Configuration:

