

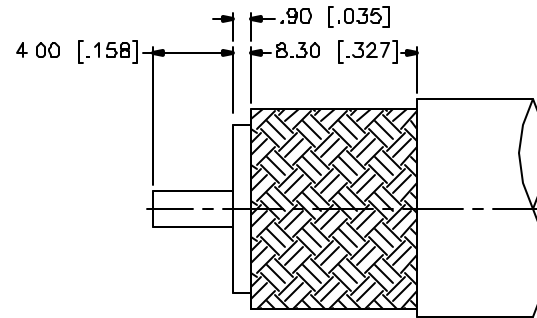
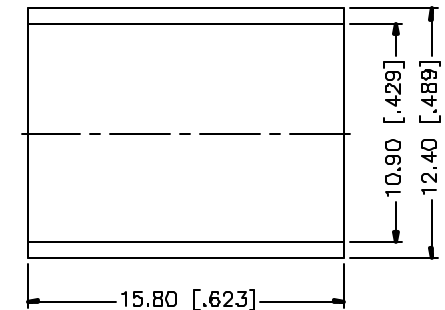


REV	DATE	DESCRIPTION
NC	01/11/05	INITIAL RELEASE

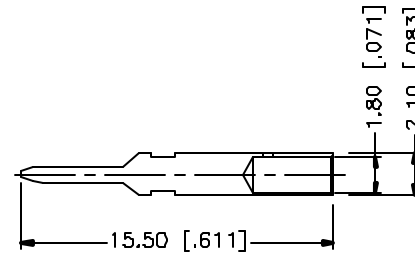

RECOMMENDED
CABLE STRIPPING DIM'S

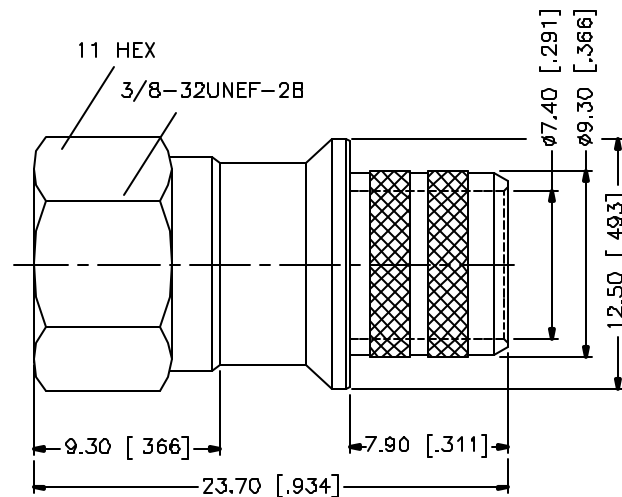

CRIMP NOTES:

1. CRIMPED FERRULE
HEX CRIMP SIZE .429"
2. CRIMPED CONTACT PIN
HEX CRIMP SIZE .068"

				UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 - 8mm ± 0.20mm 8 - 30mm ± 0.40mm 30 - 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 - .315 = ± 0.007" .315 - 1.180 = ± 0.015" 1.180 - 4.724 = ± 0.020" DO NOT SCALE DRAWING	APPROVALS		DATE		Amphenol Connex				
8					DRAWN	G.R.S.	01/11/05						
7					CHECKED					PART DESCRIPTION F CRIMP PLUG (FOR RG-11/U - 14 AWG CONTACT)			
6					ISSUED								
5					SHEET	1 OF 1				PART NO 222195			
4	FERRULE	COPPER	NICKEL	1									
3	CONTACT PIN	BRASS	GOLD	1					DWG NO 222195.DWG REV NC SIZE A SCALE NA				
2	INSULATOR	DELRI	NATURAL	1									
1	BODY	BRASS	NICKEL	1									
DESCRIPTION		MATERIAL	FINISH	QTY	CAD FILE C:/222/222195.DWG								